



Mounting

of the fix glass


Mounting

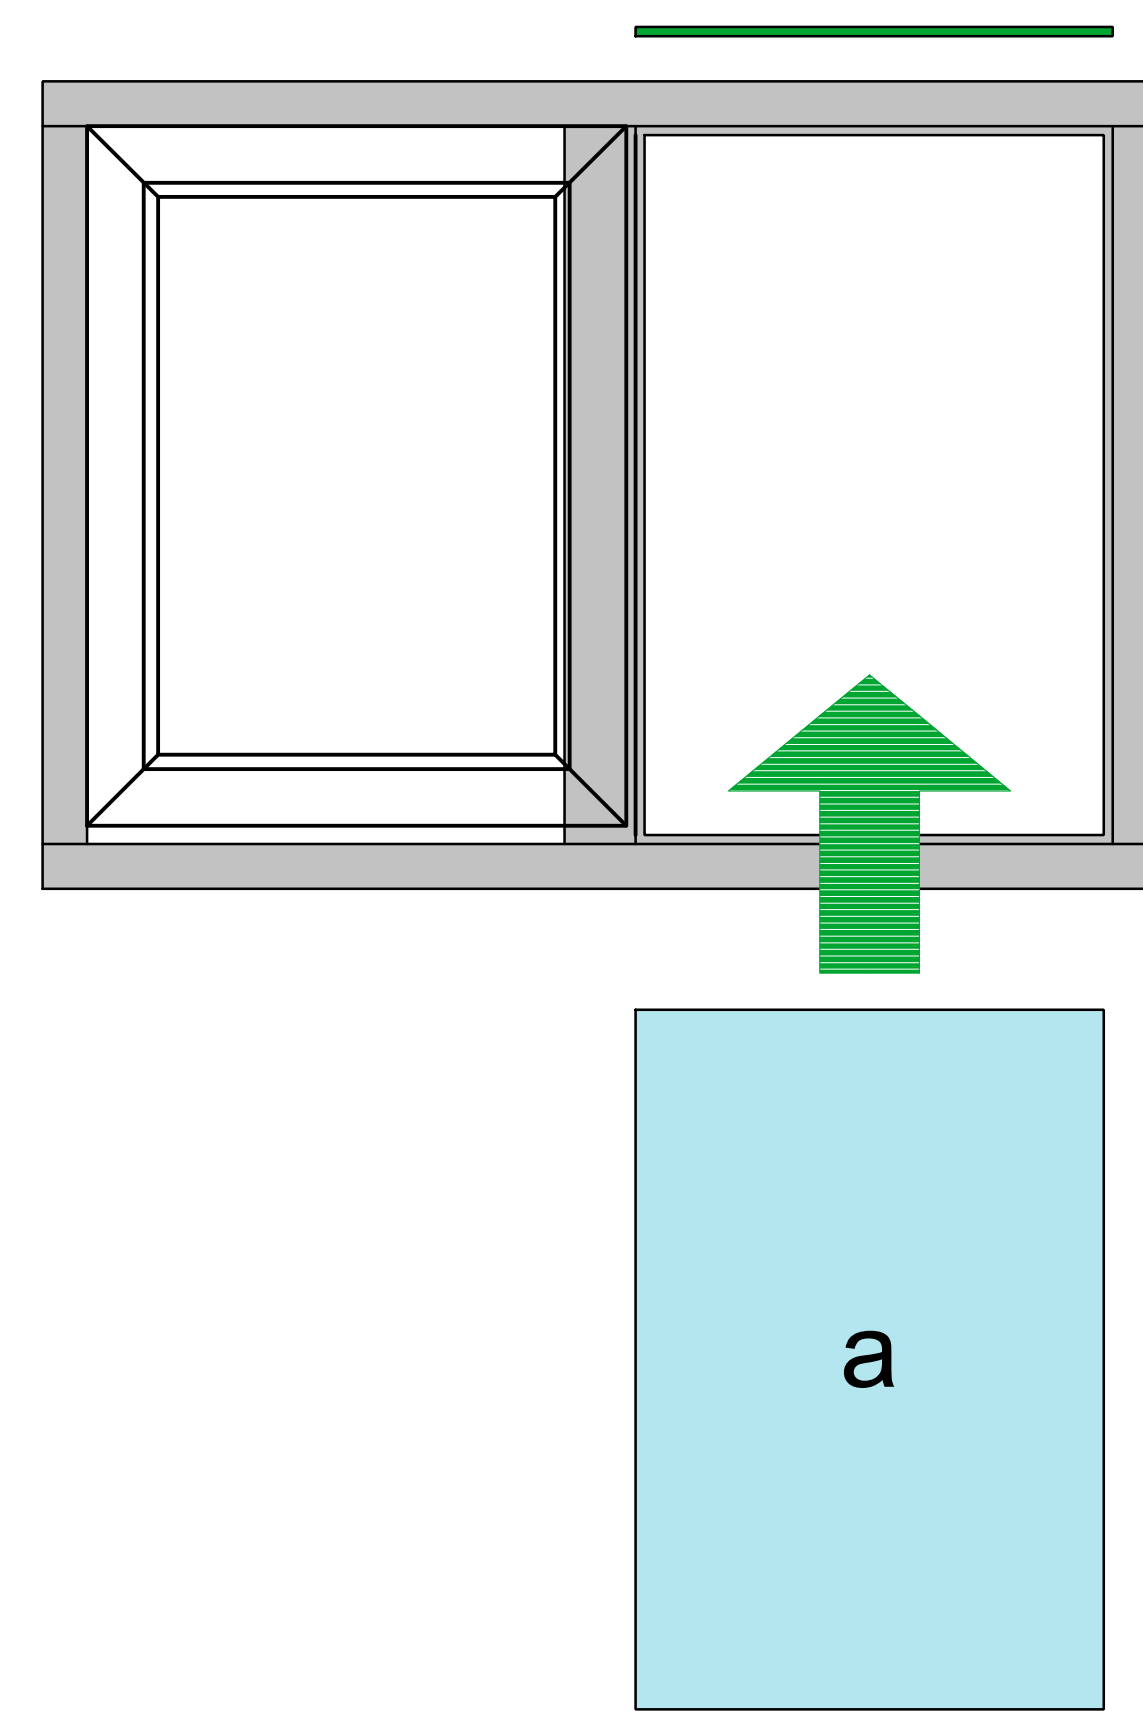


1. Position the tilted fix glass (a) without the glazing beads (b) and without glazing bloks.(c)

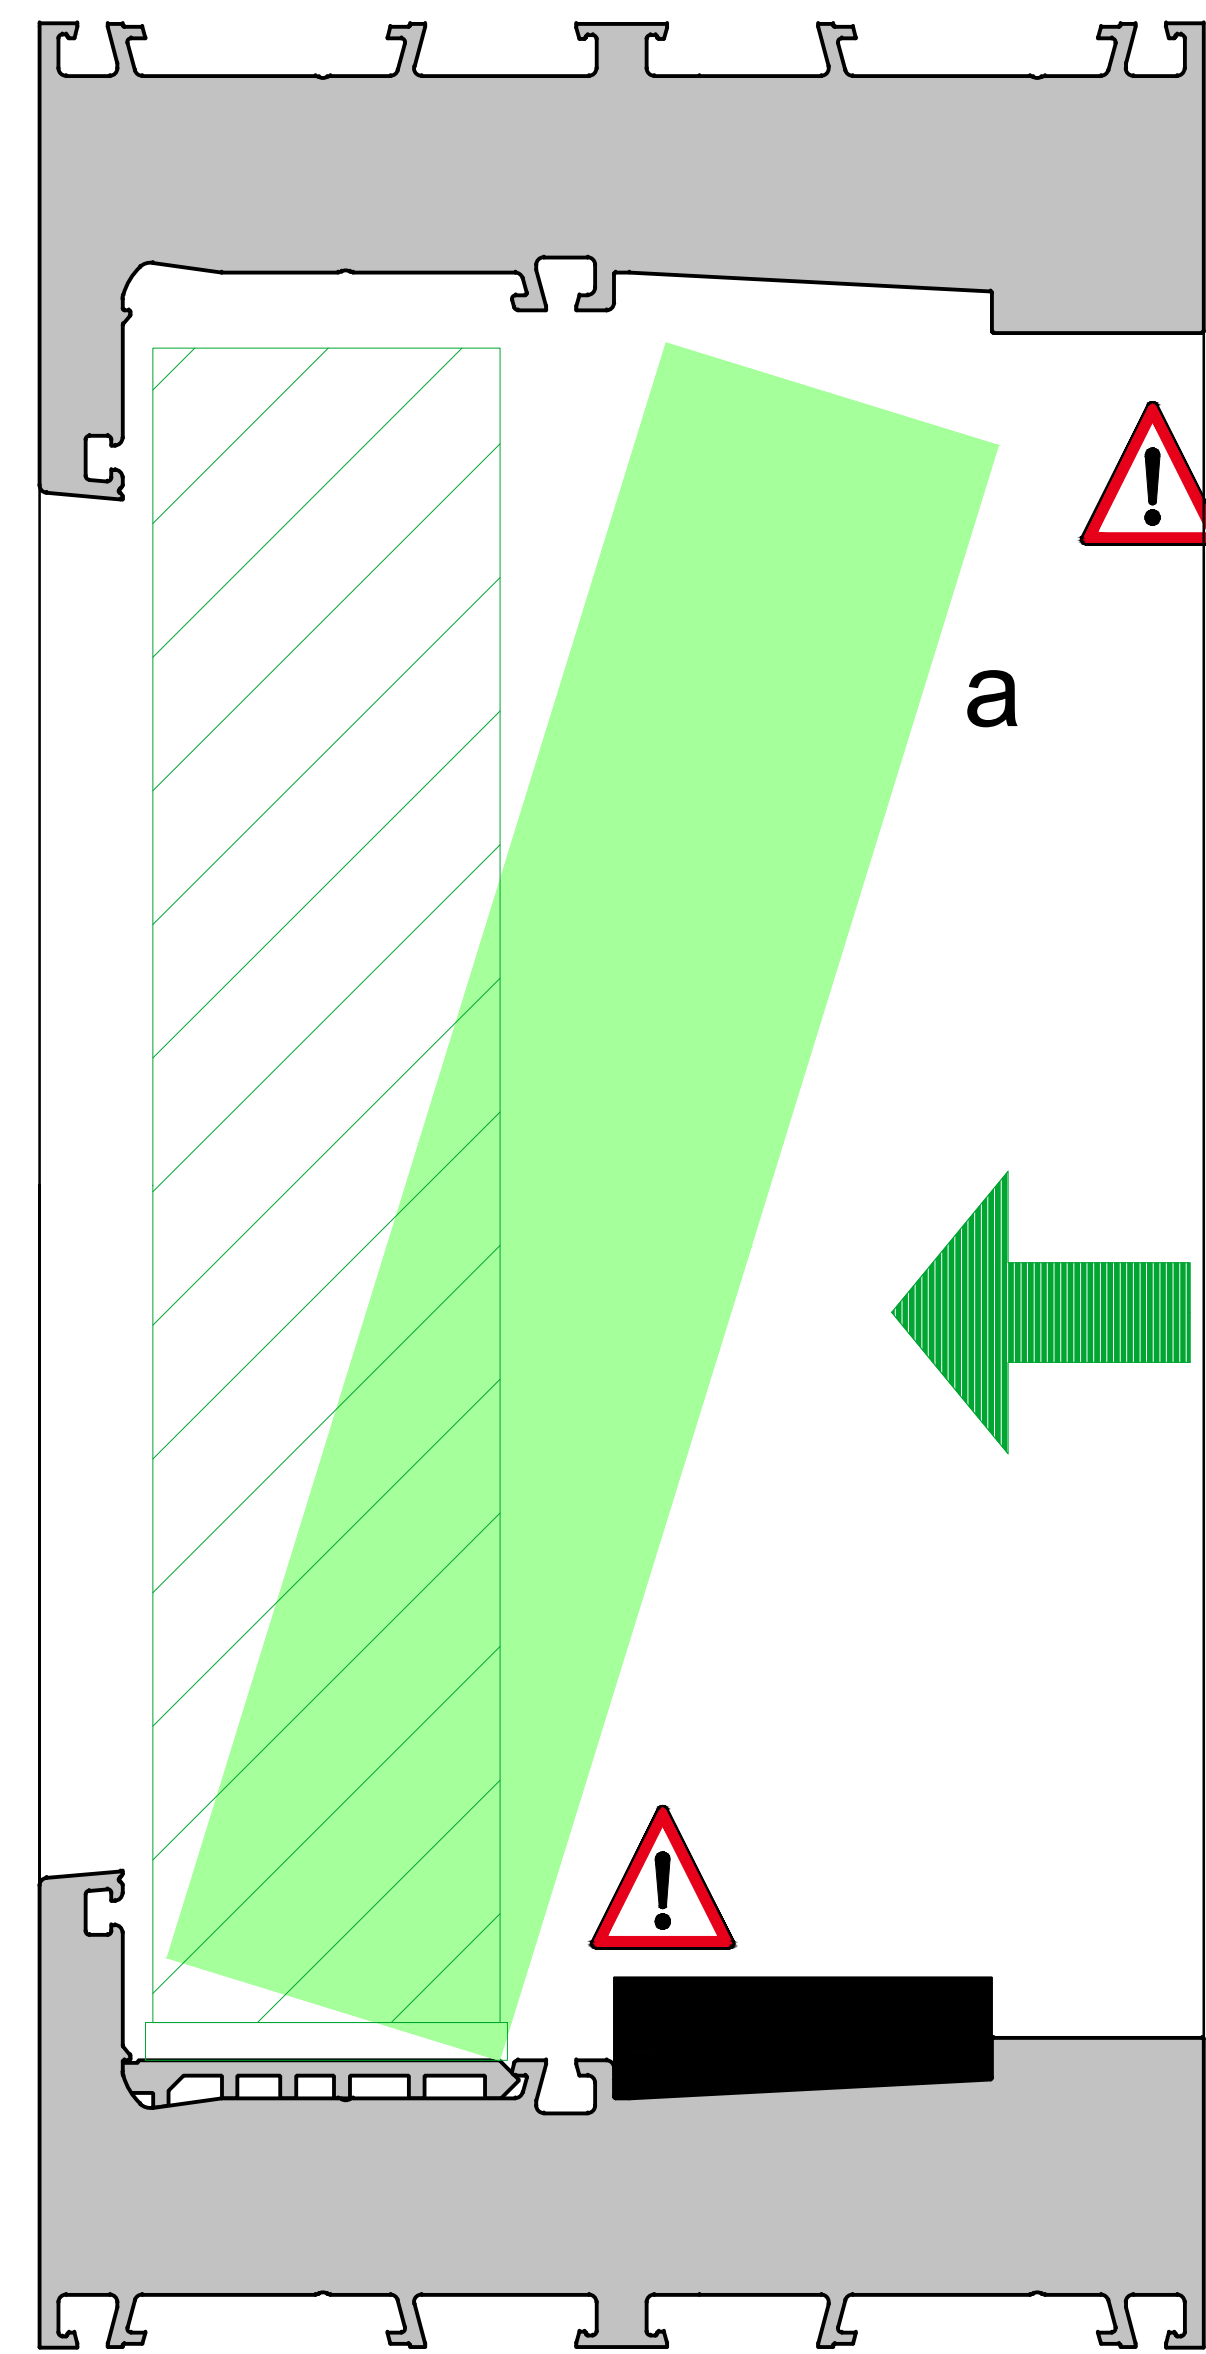


2. Place the glazing beads (c) Place the glazing bloks under and on the sides glass (b)

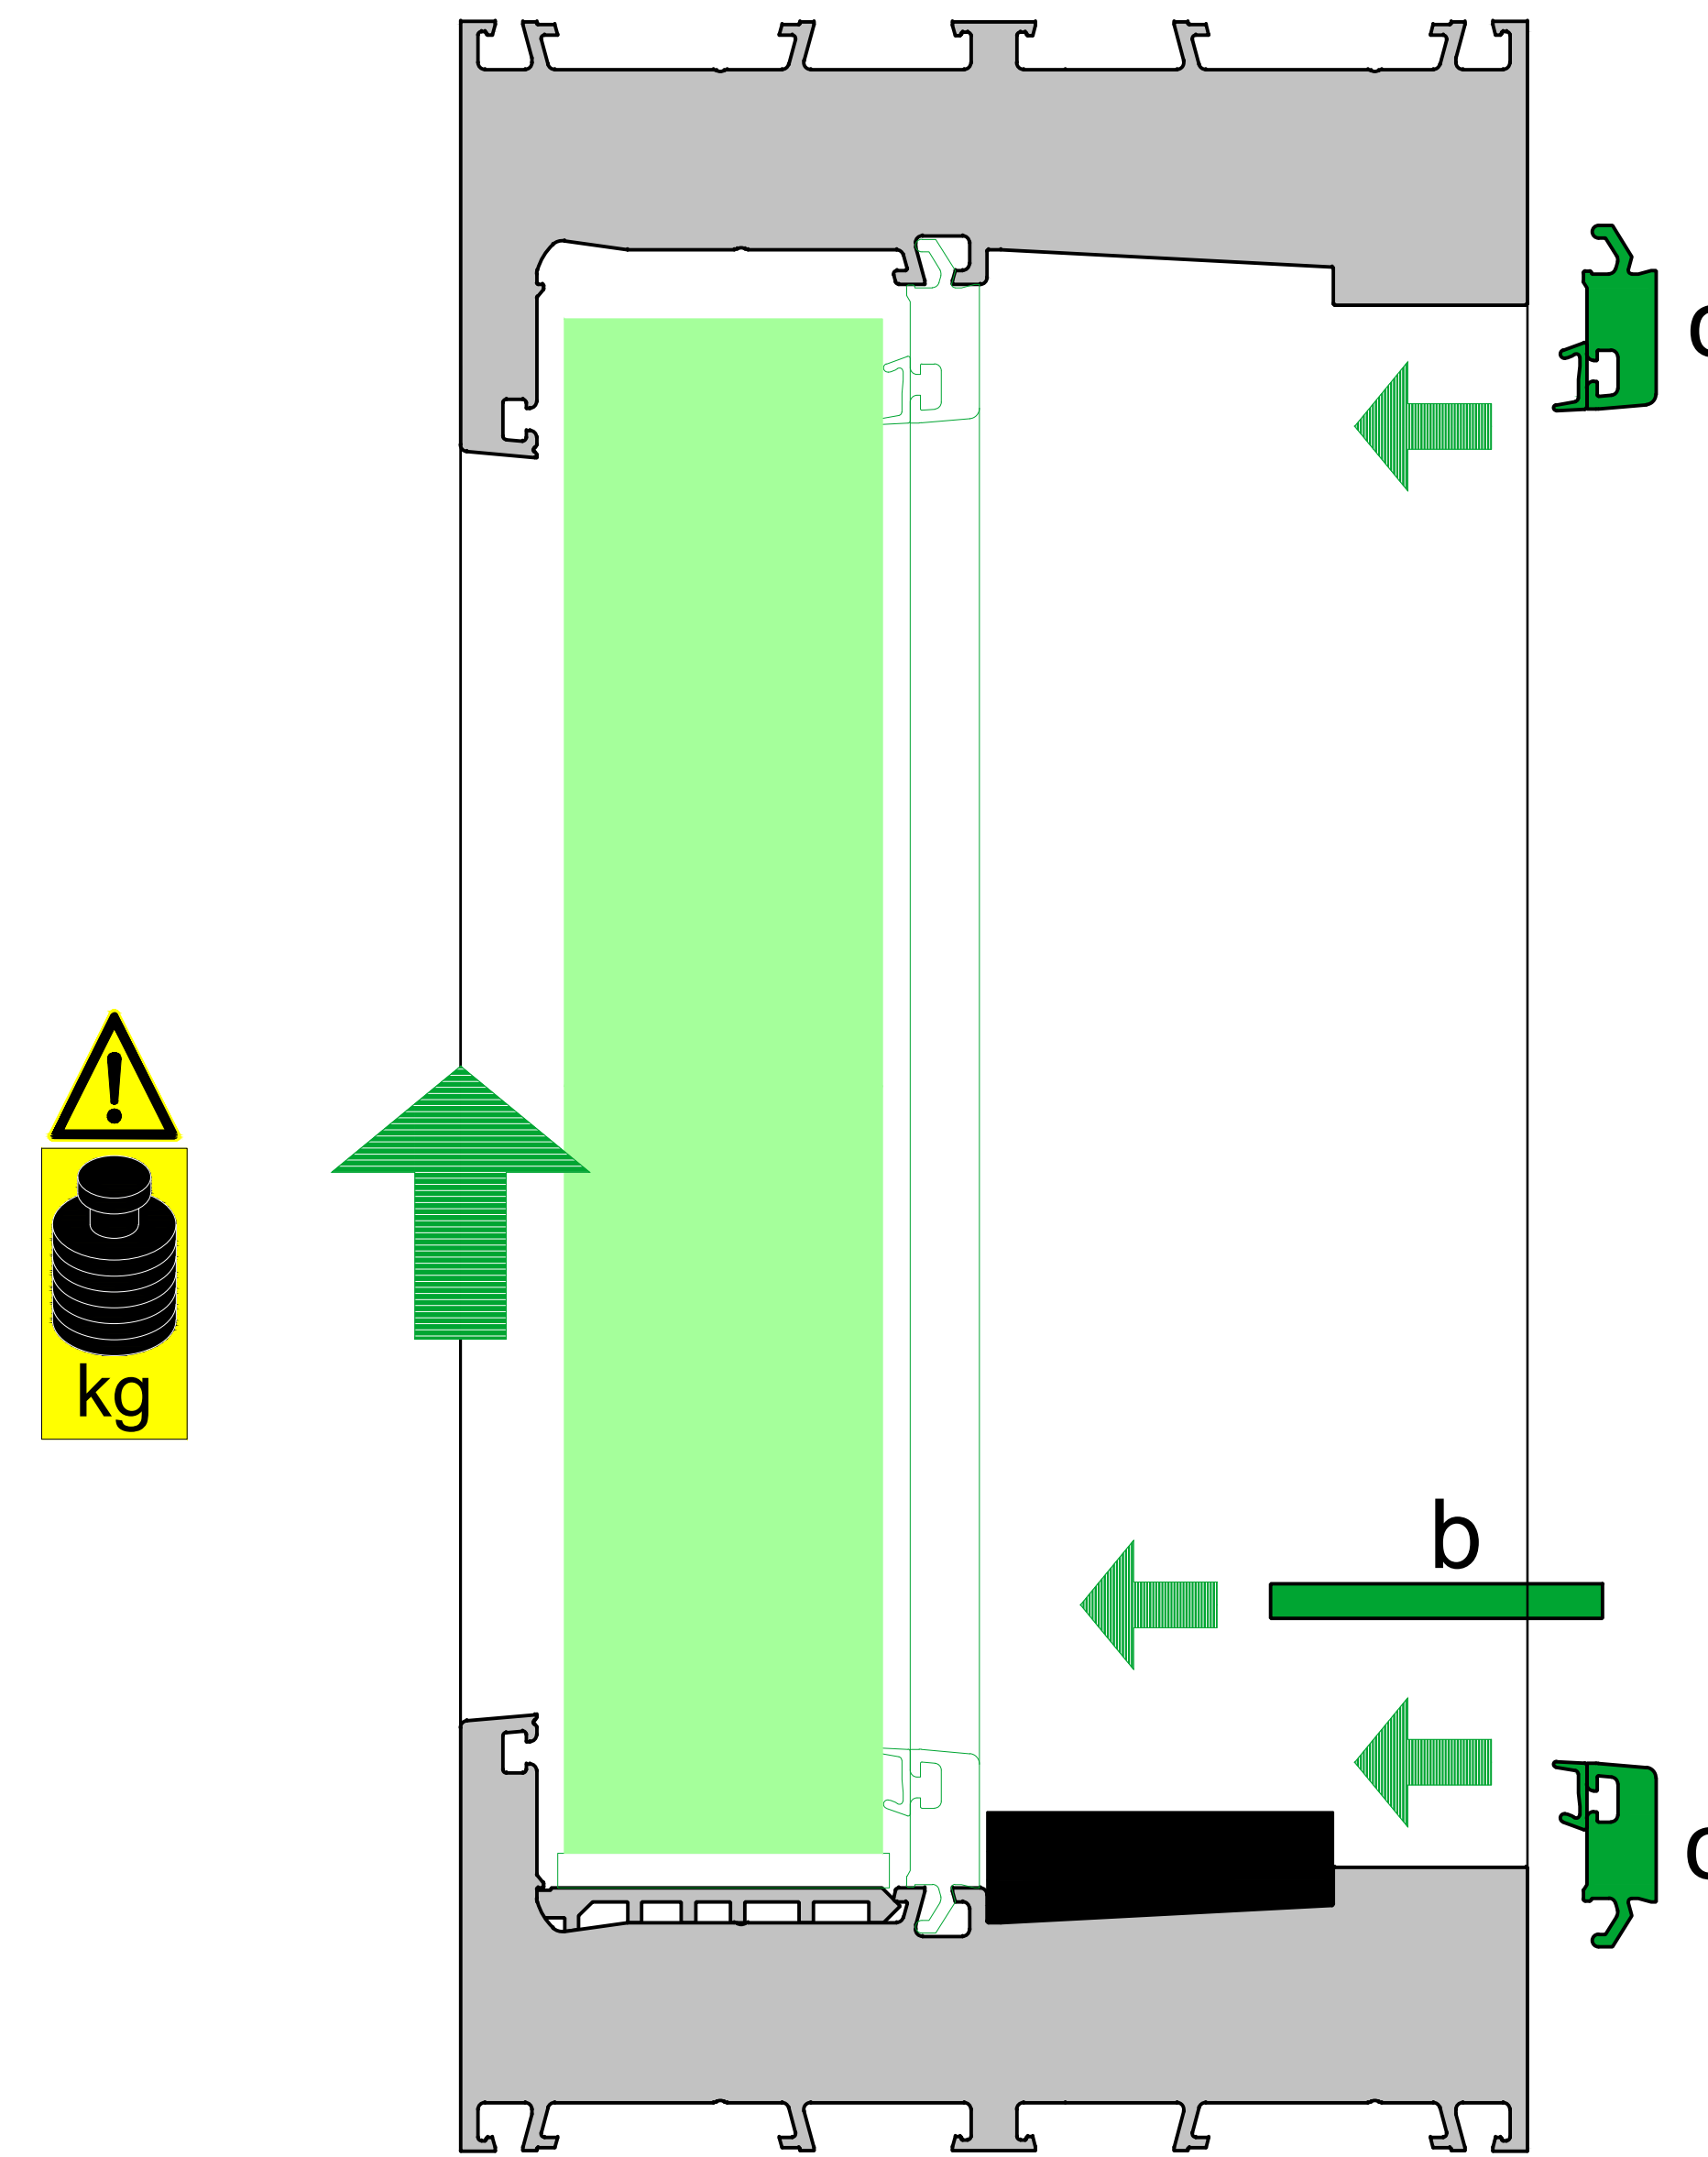

3. Place the half guide rail (d) in the frame (e) and fix it with screws, for Example 3.9x25mm (f).

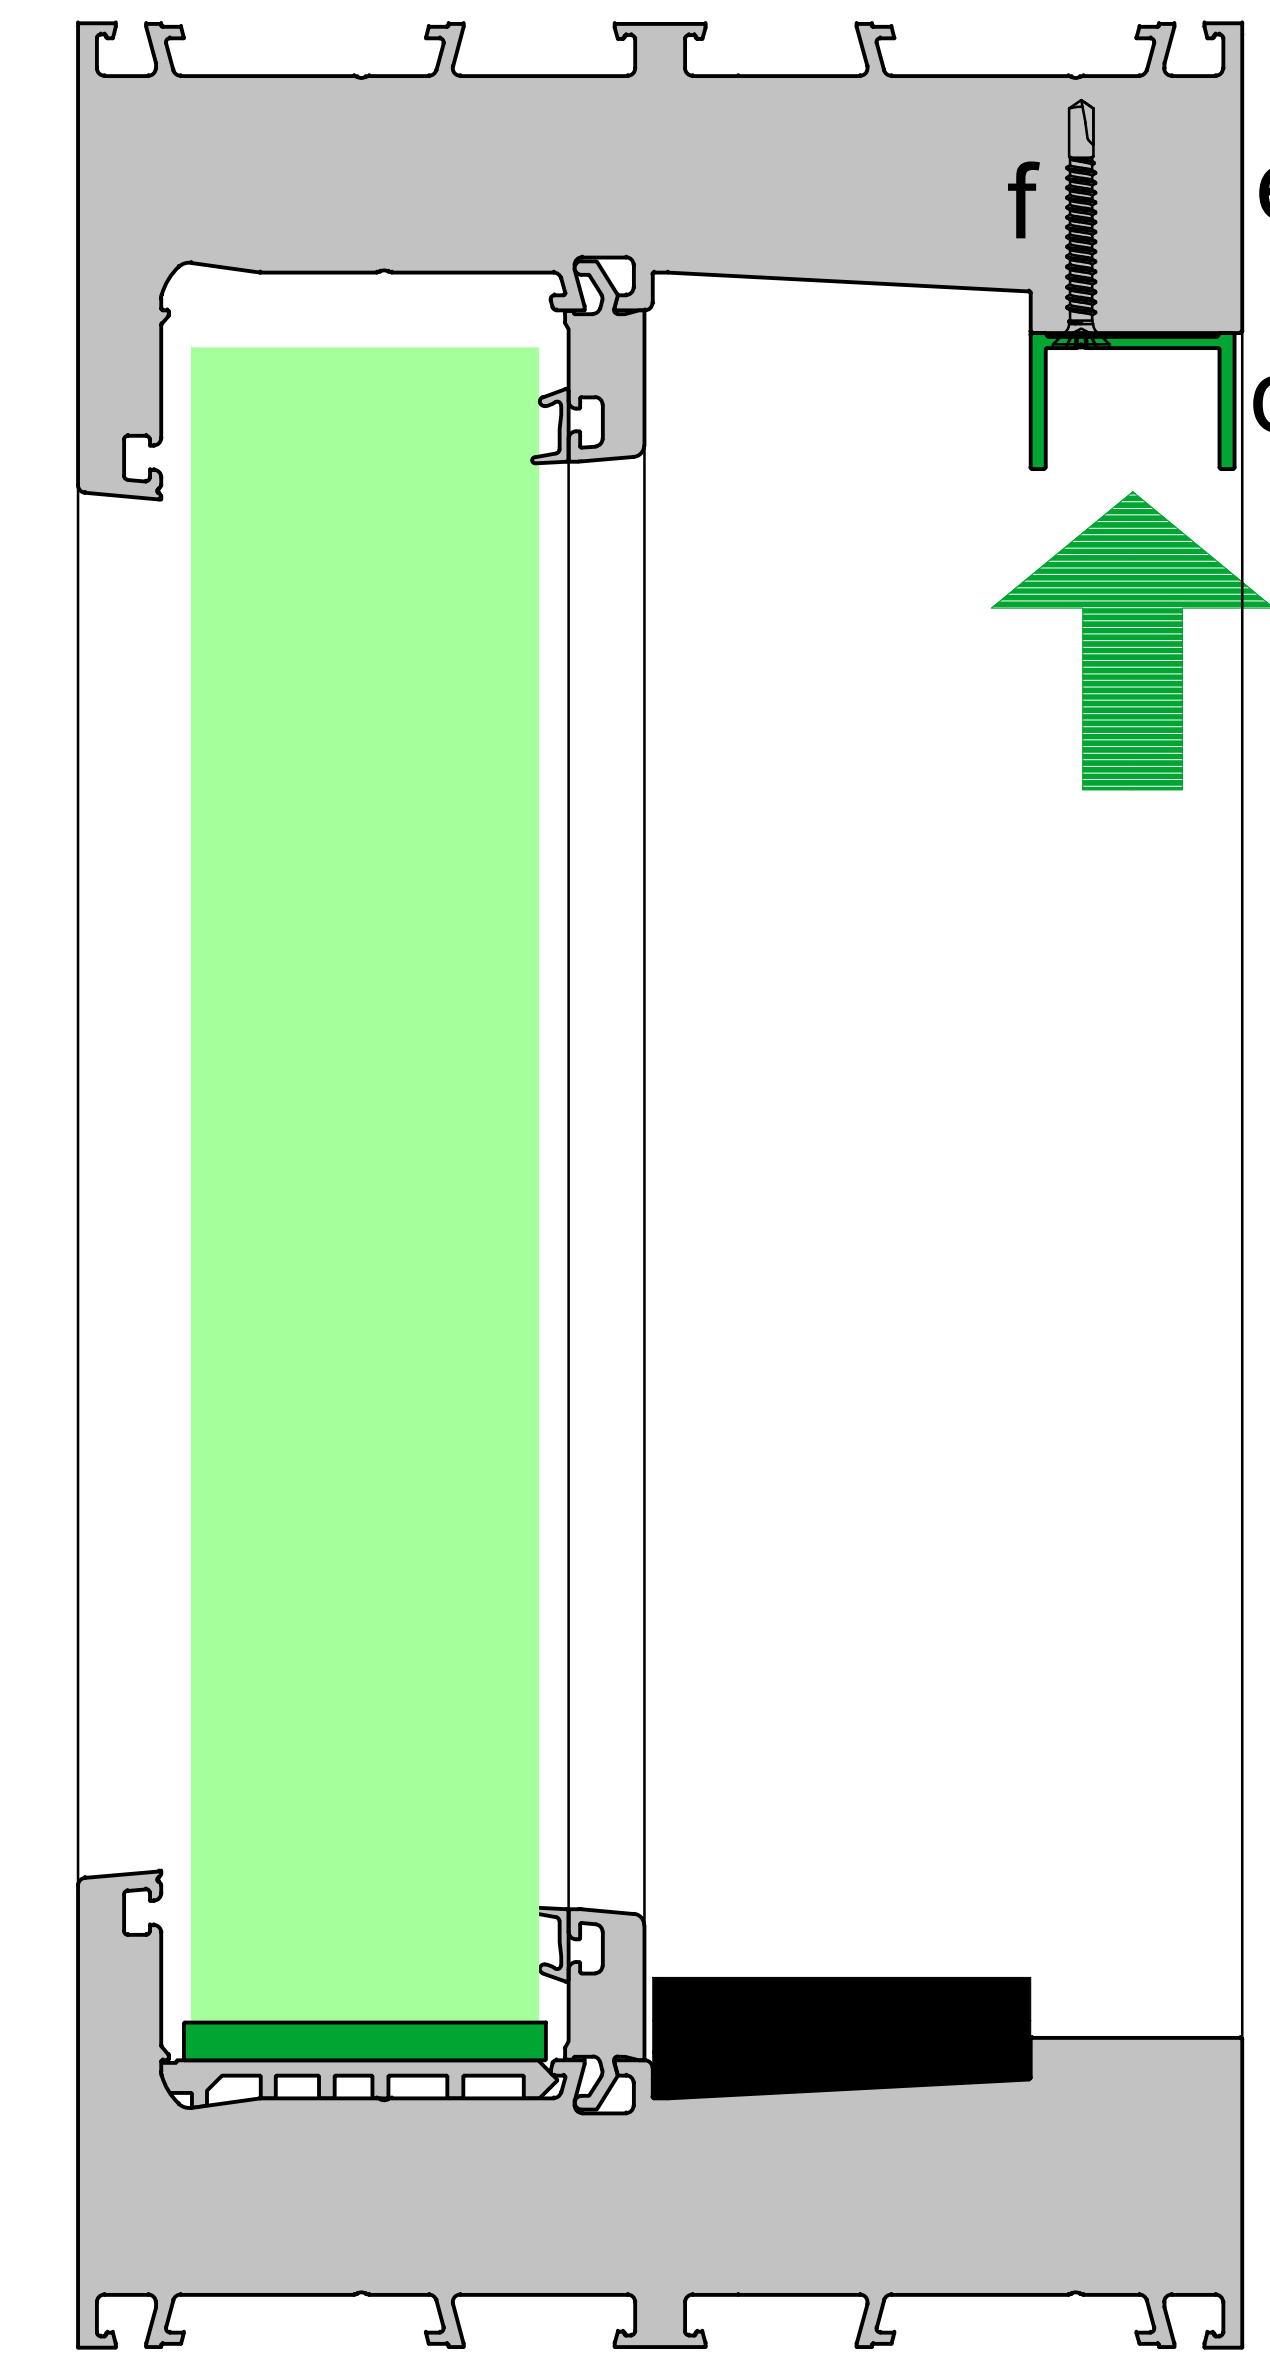


4.

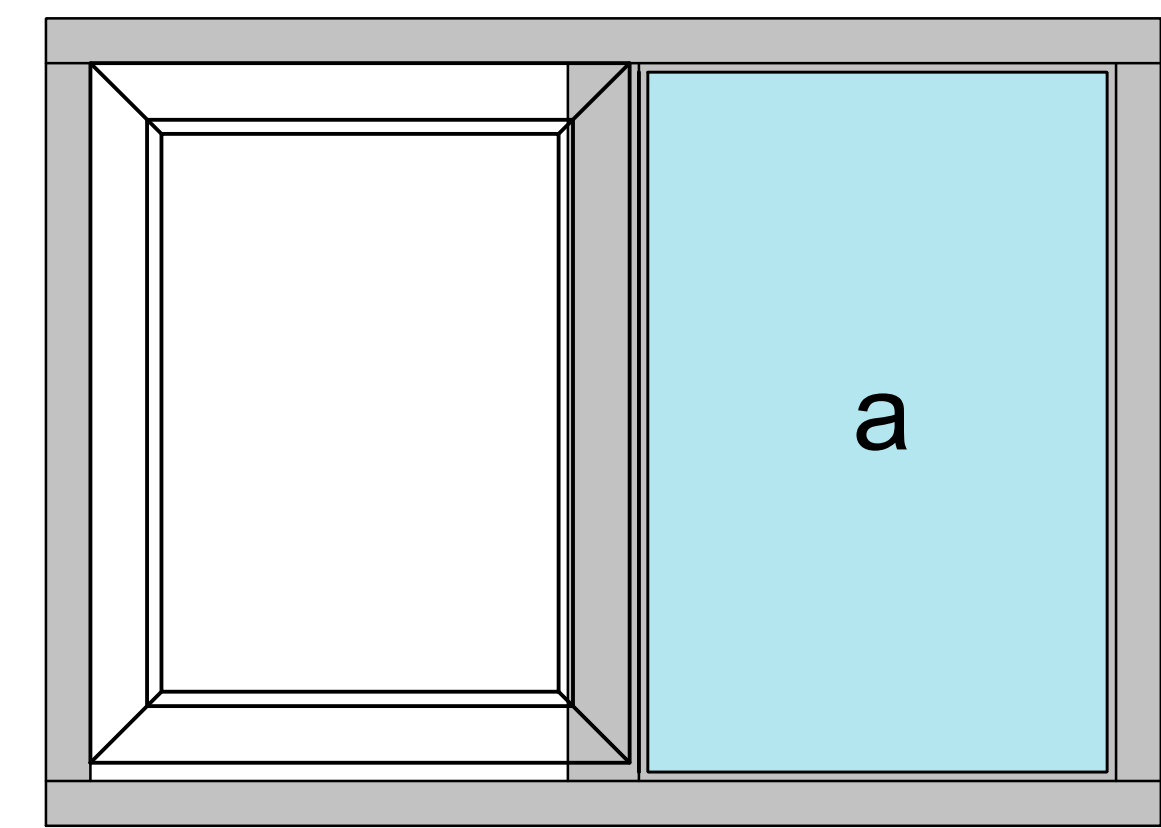


Dismounting

of the fix glass


Dismounting

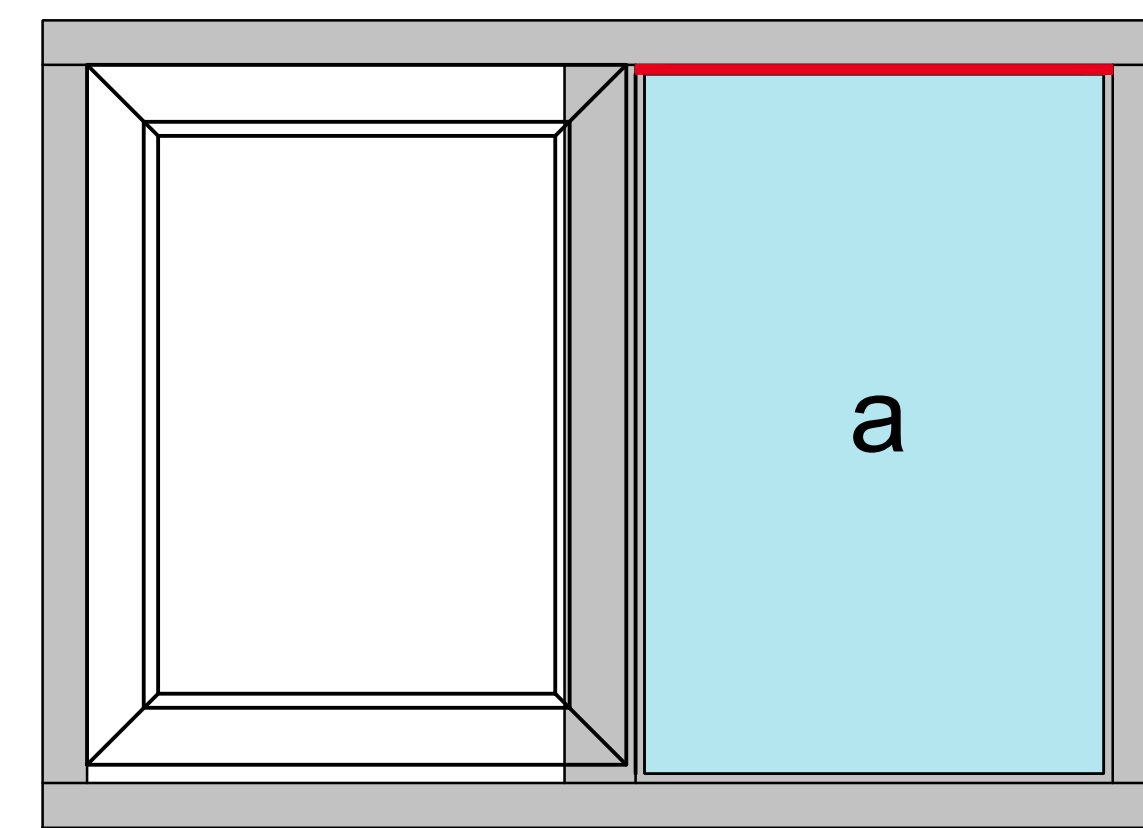


1. Remove the screws (f), replace the guide rail (d)

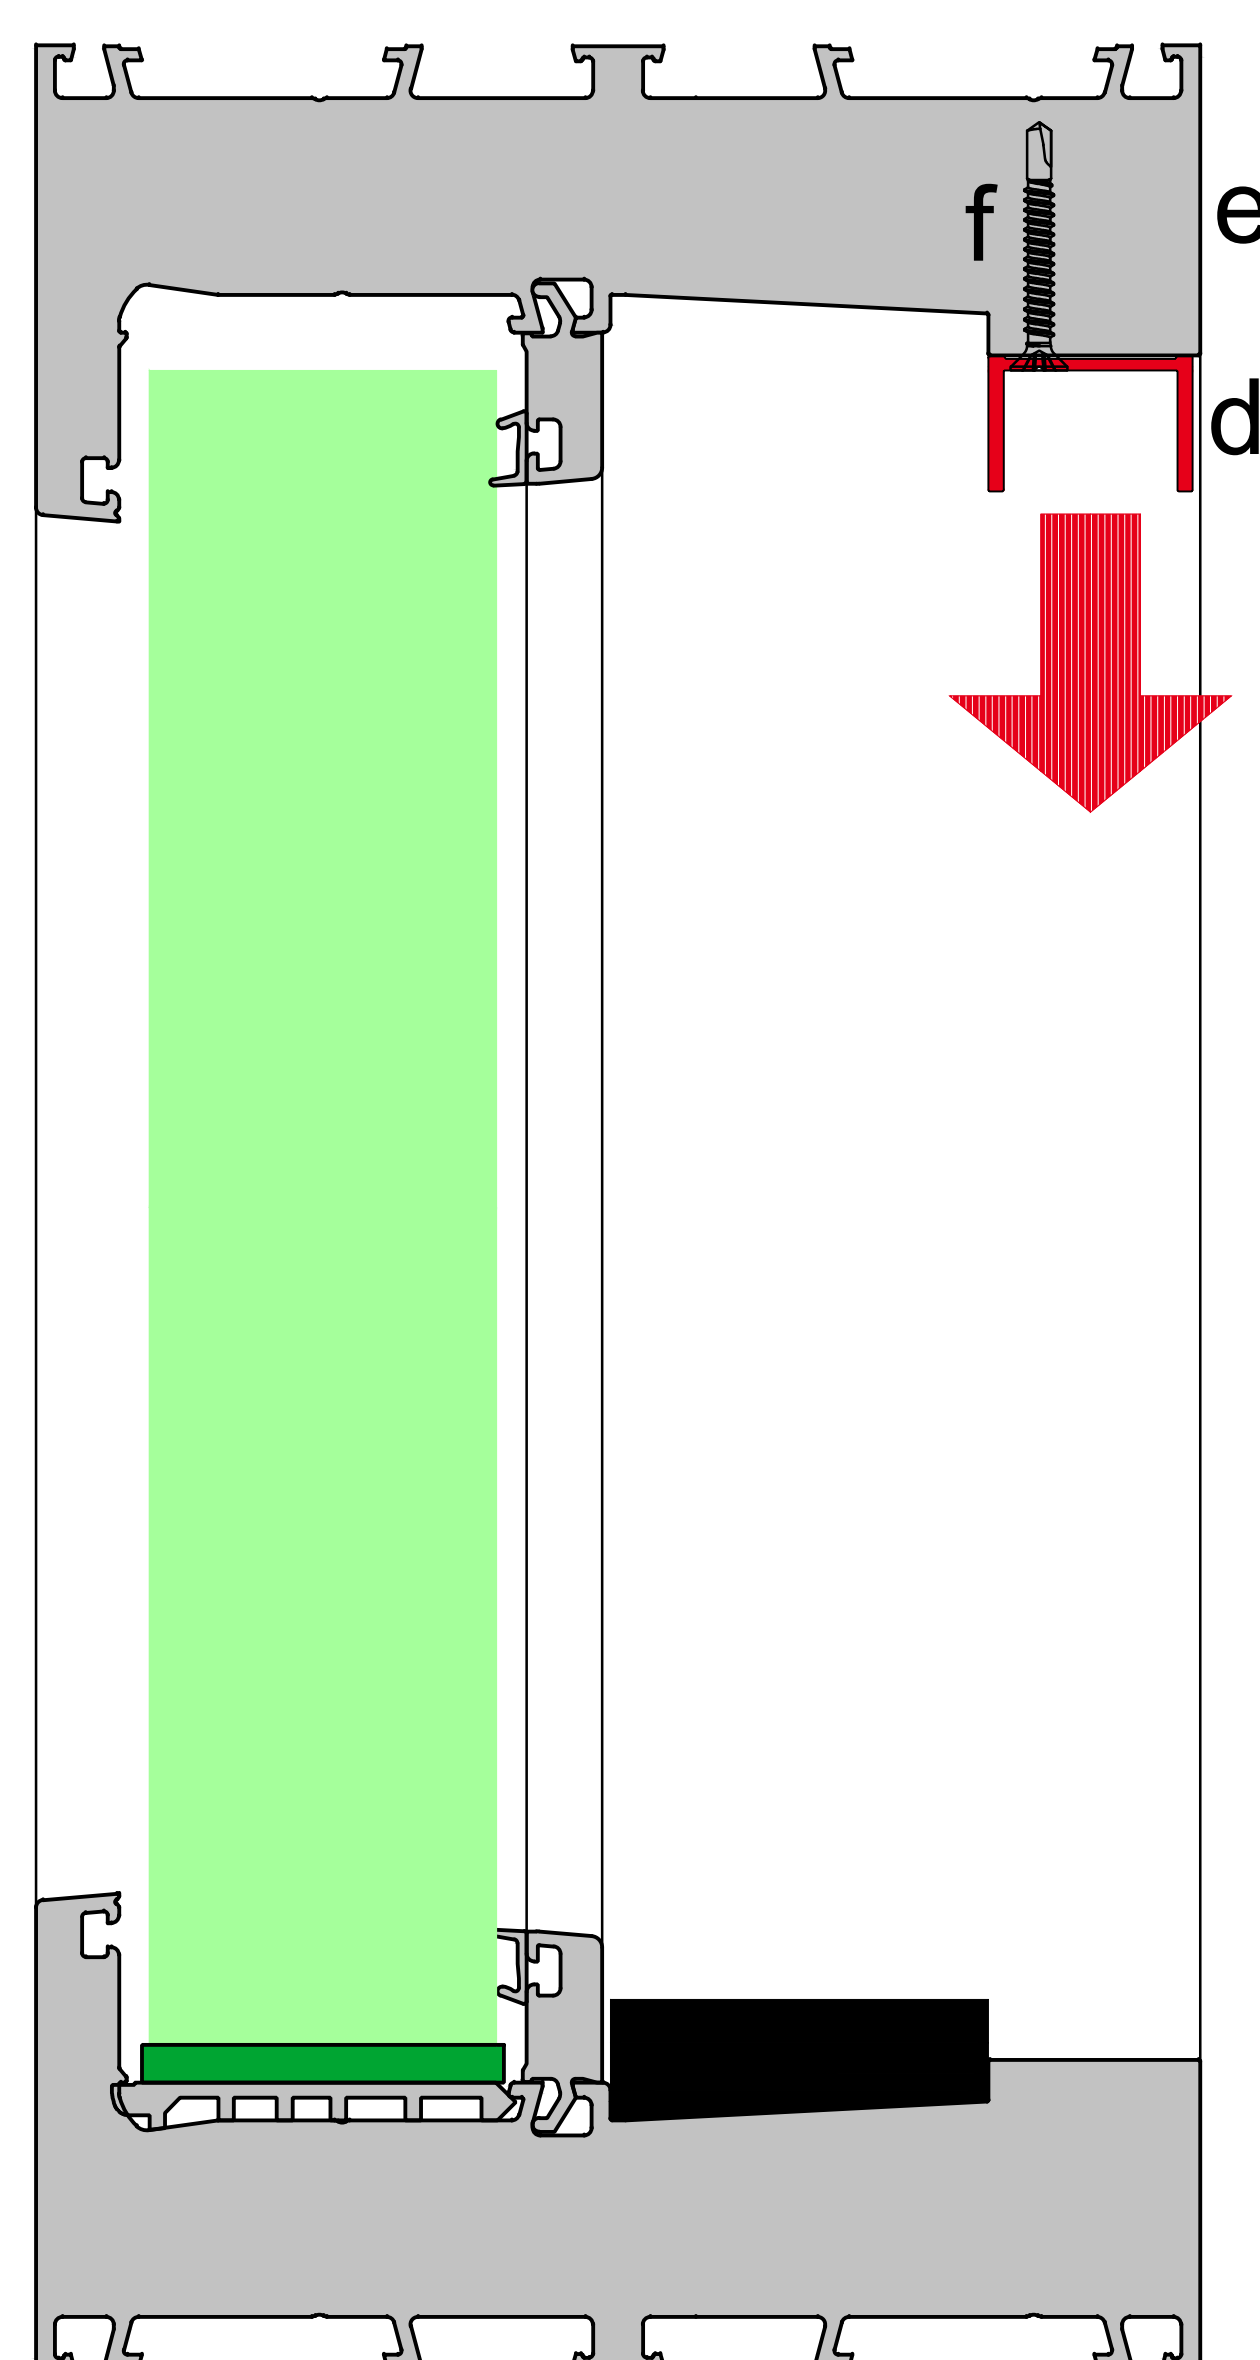


2. replace the glazing beads (c) replace the glazing bloks under and on the sides glass (b)

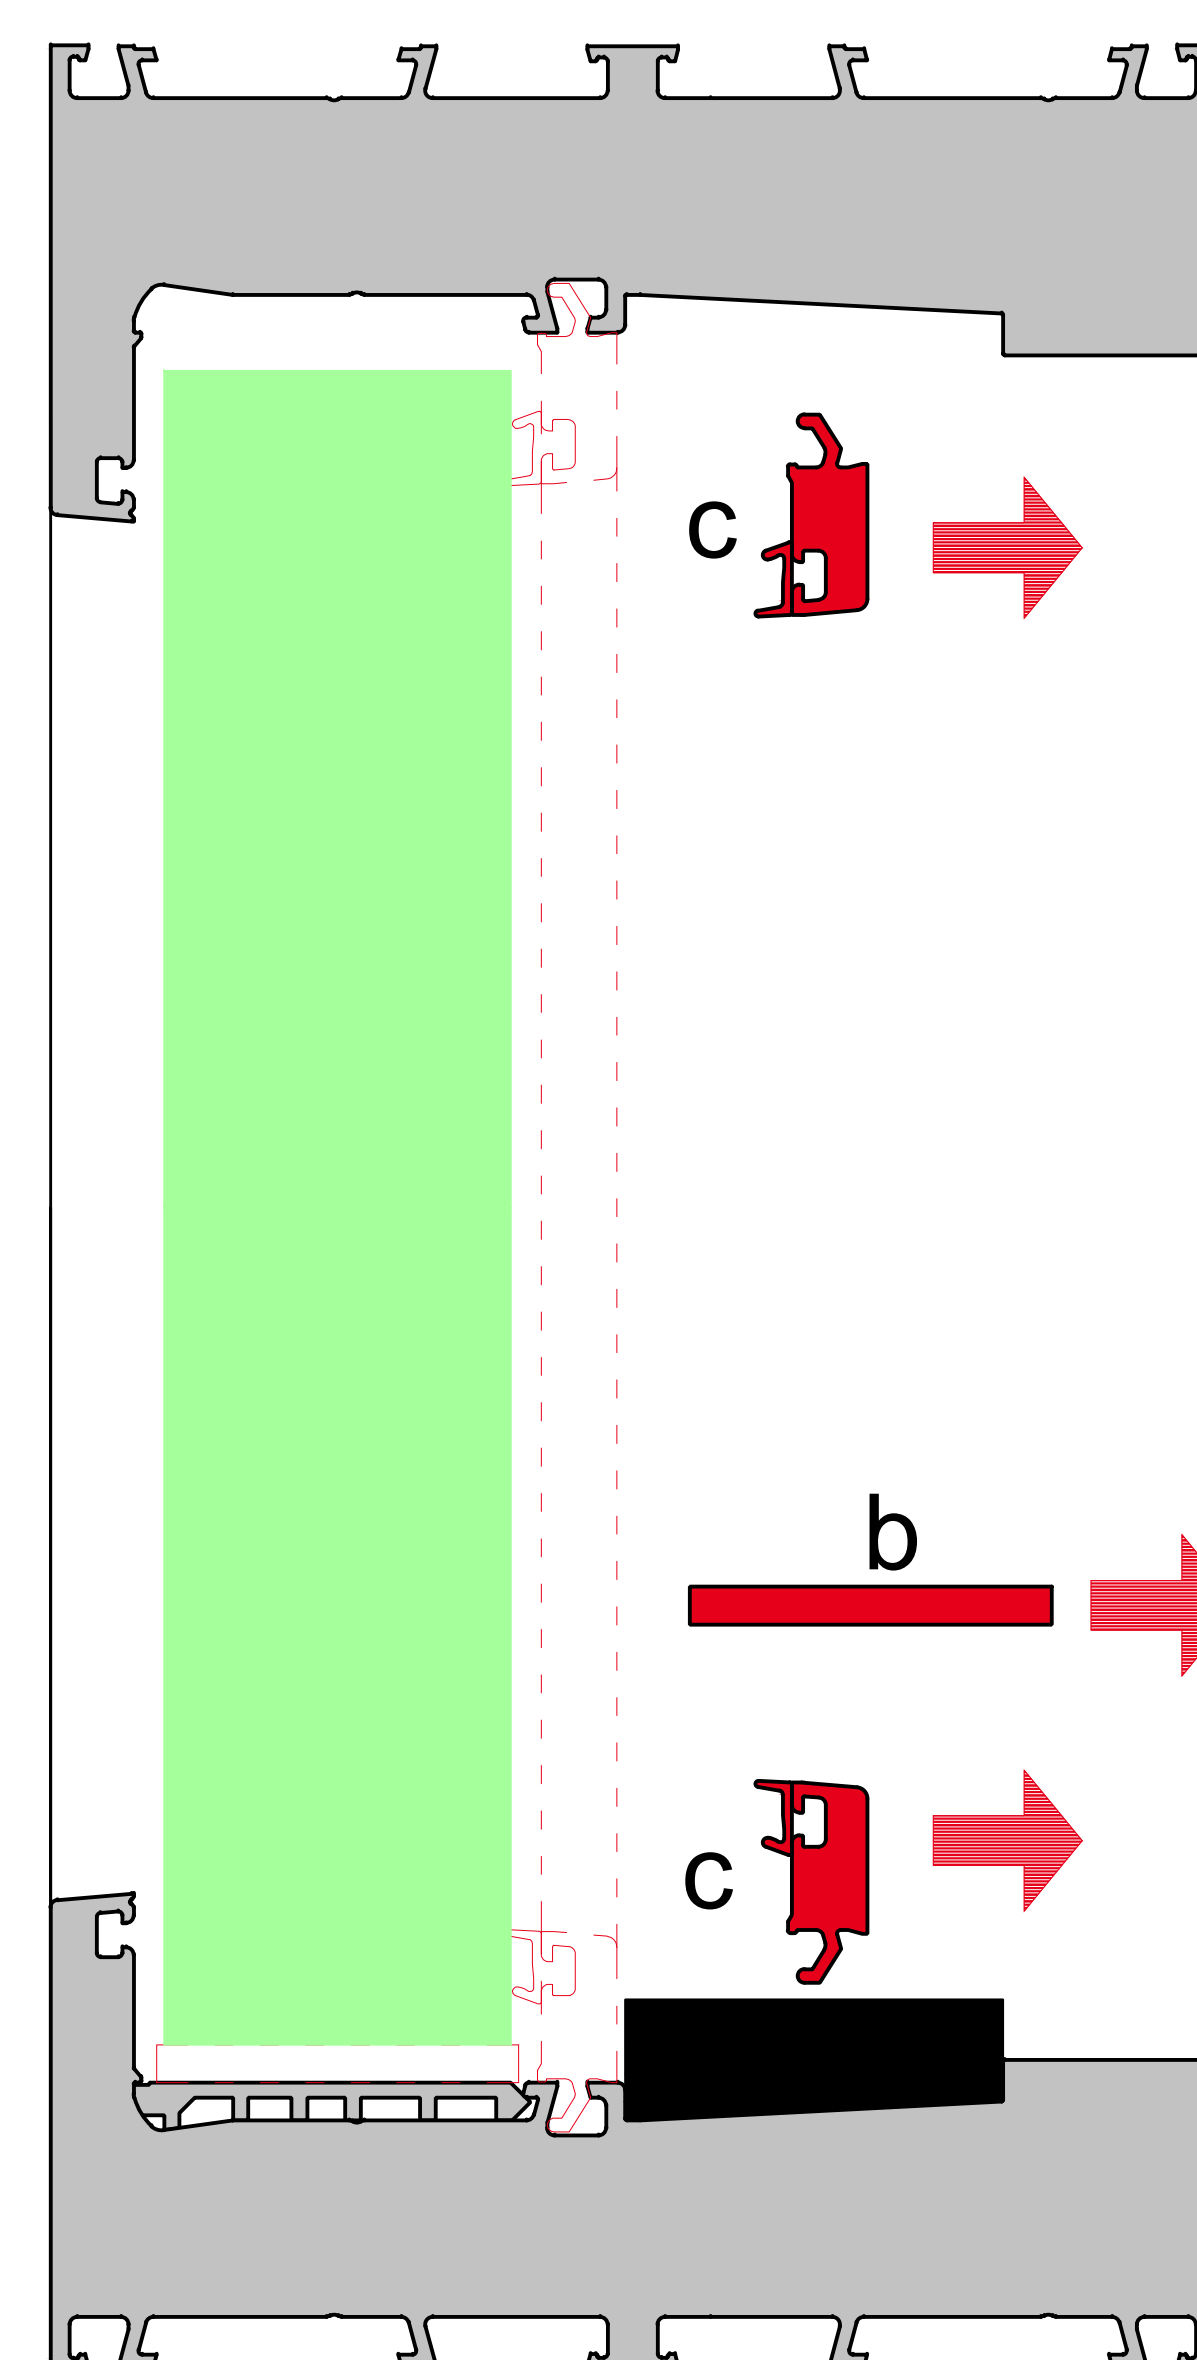

3. Tilt the fix glass (a)

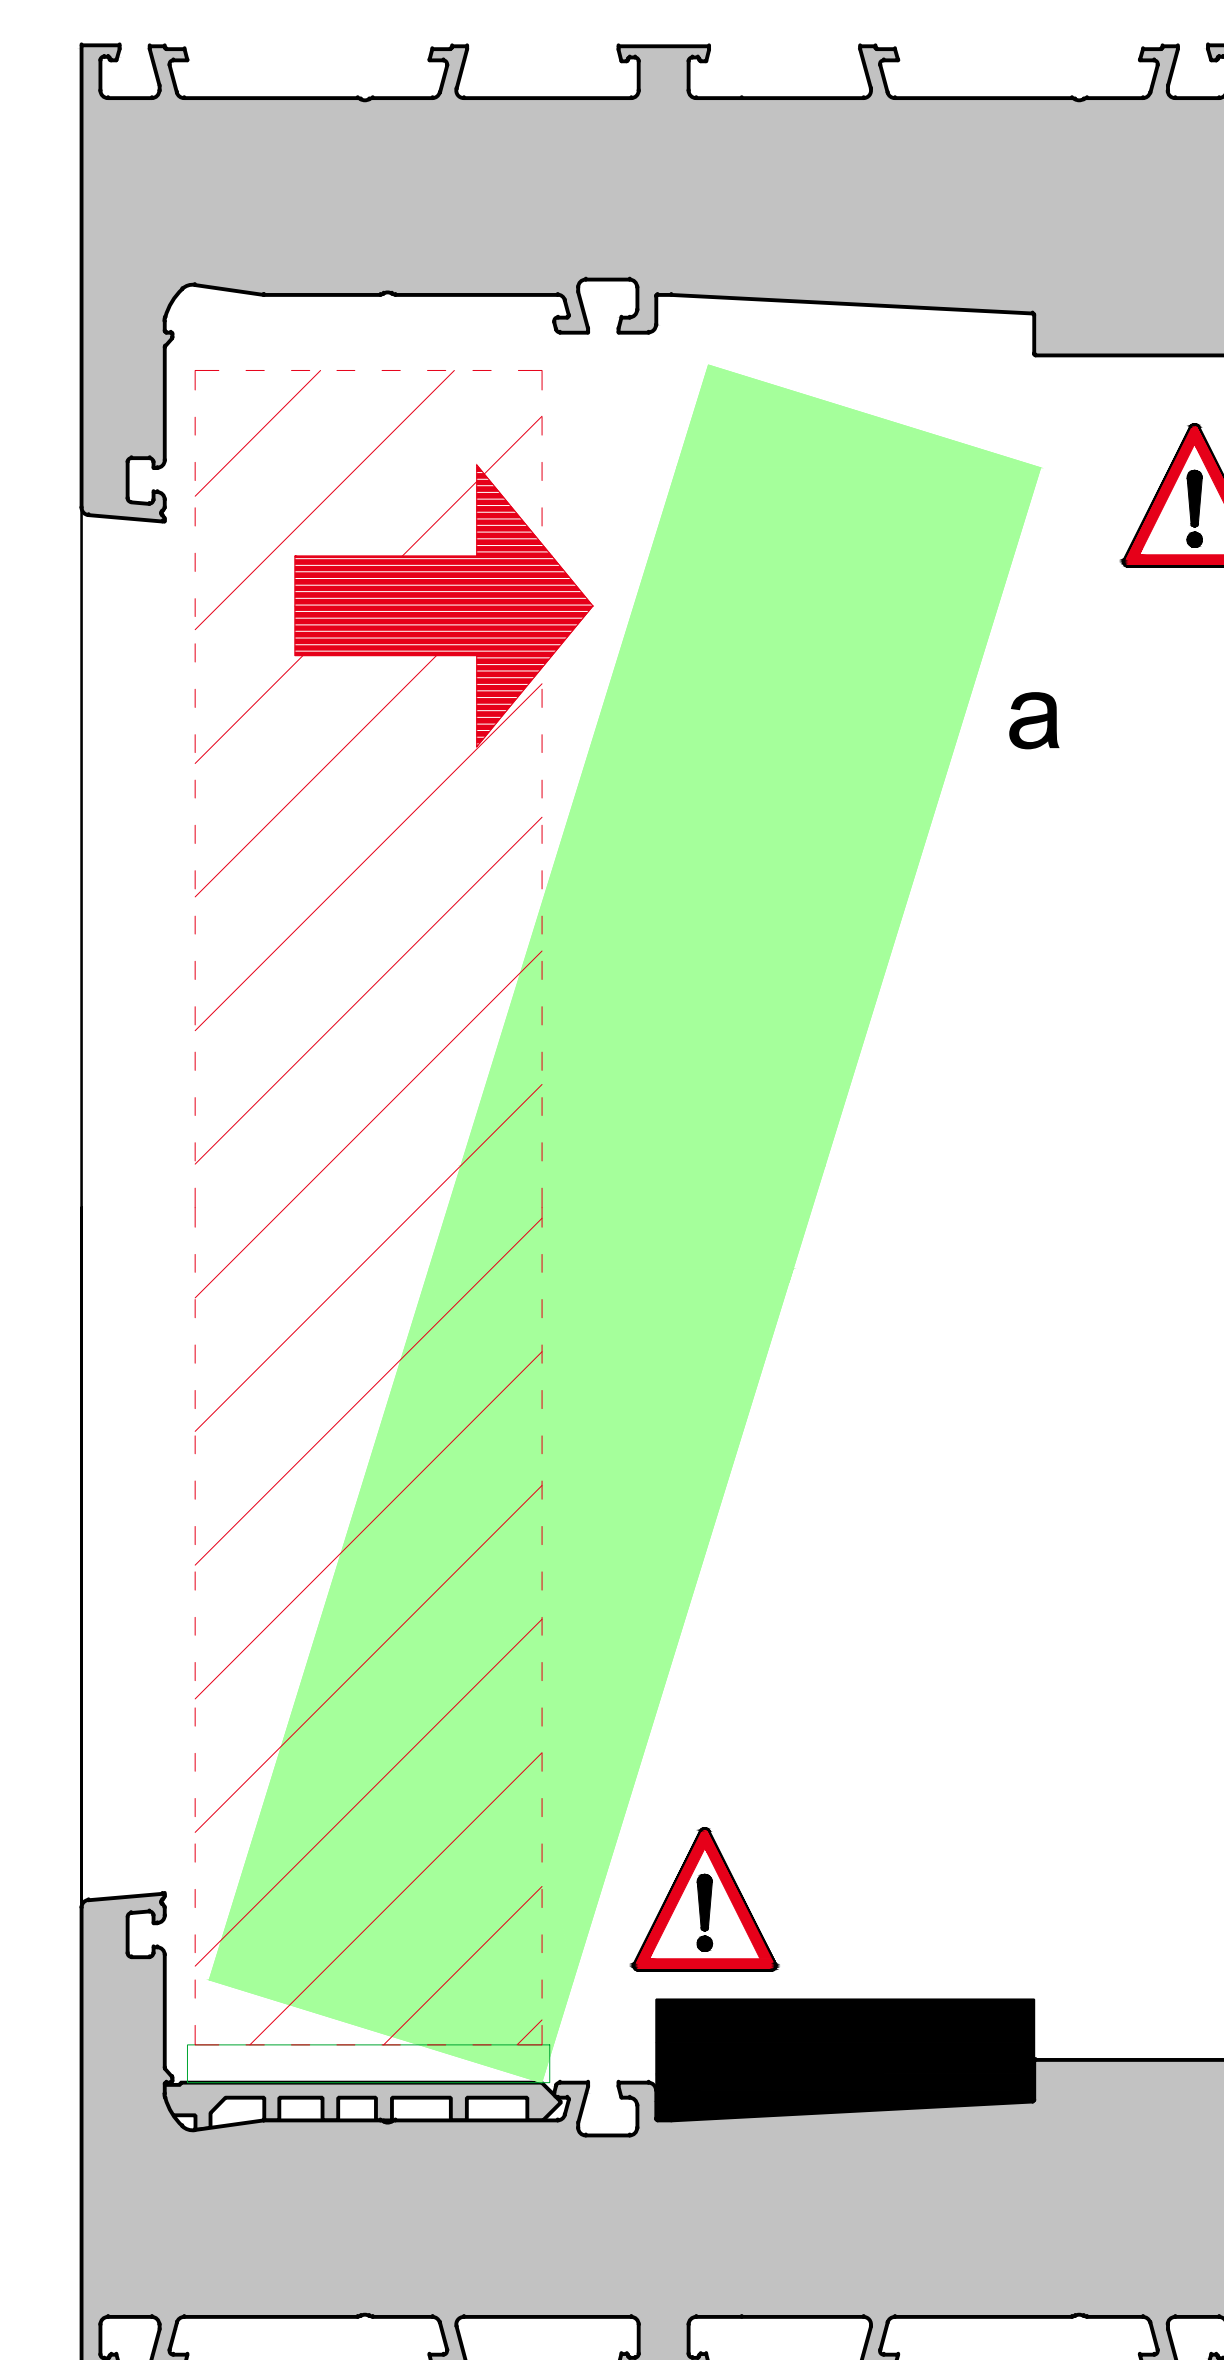

4.

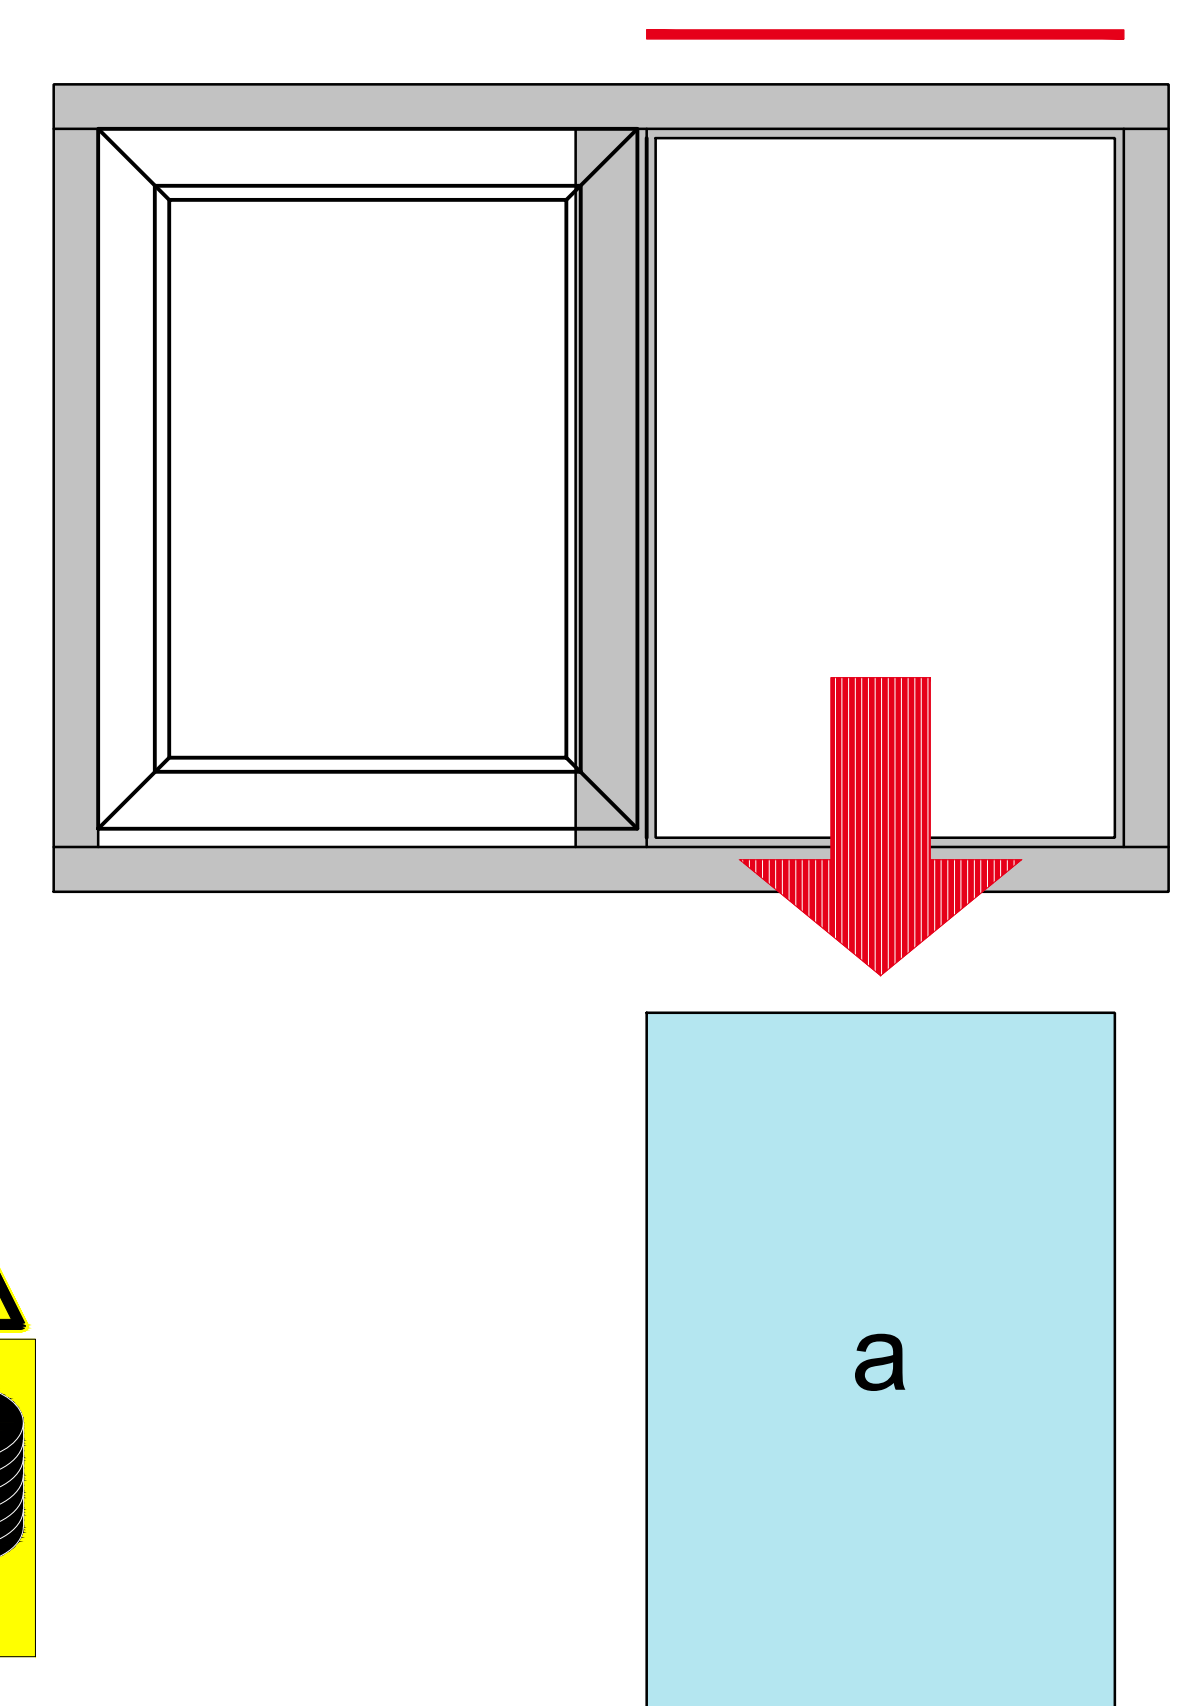

Mounting of the Sliding Sash






Mounting

1. Position the tilted sliding sash (a) without the already inserted half of guide rail (b), then set the sash upright.

2. Move the sliding sash on the other halfside of product. Insert the second half of guide rail into frame (c).

3. Fix the guide rail with screws, for Example 3.9 x 25 mm (d).

4. Check the sliding sash's (a) functionality.

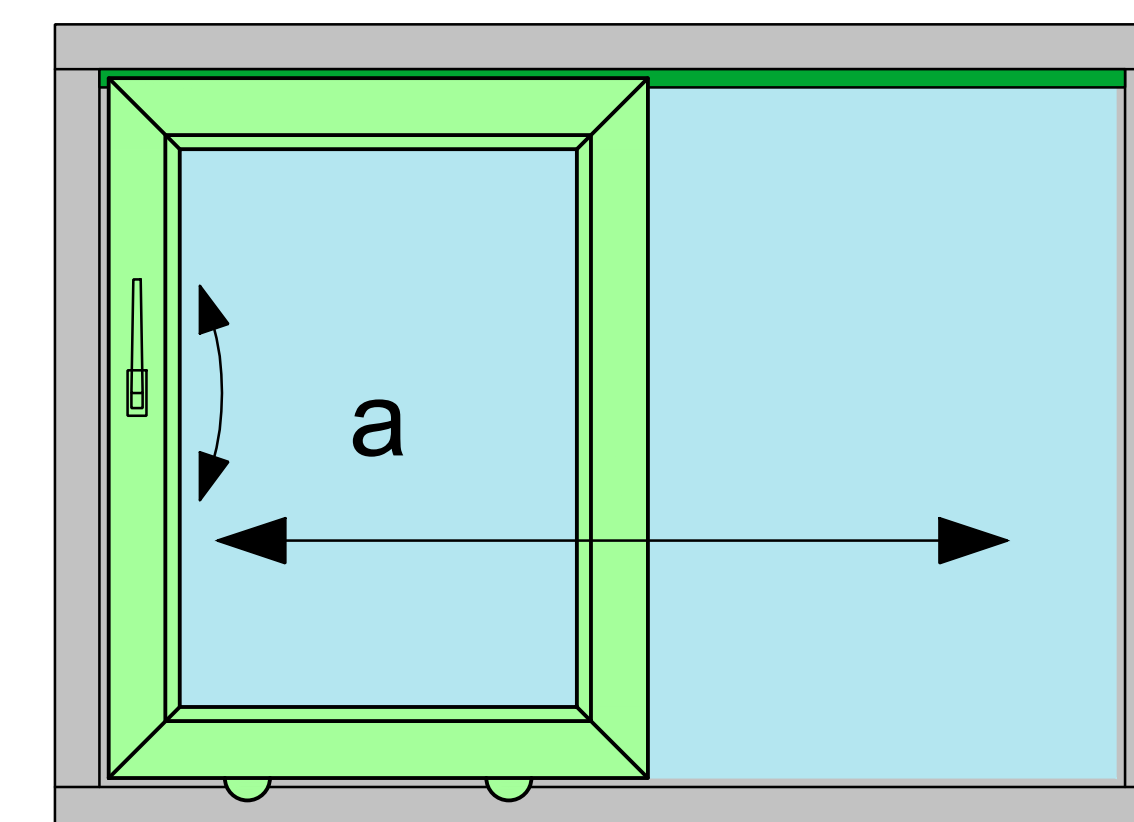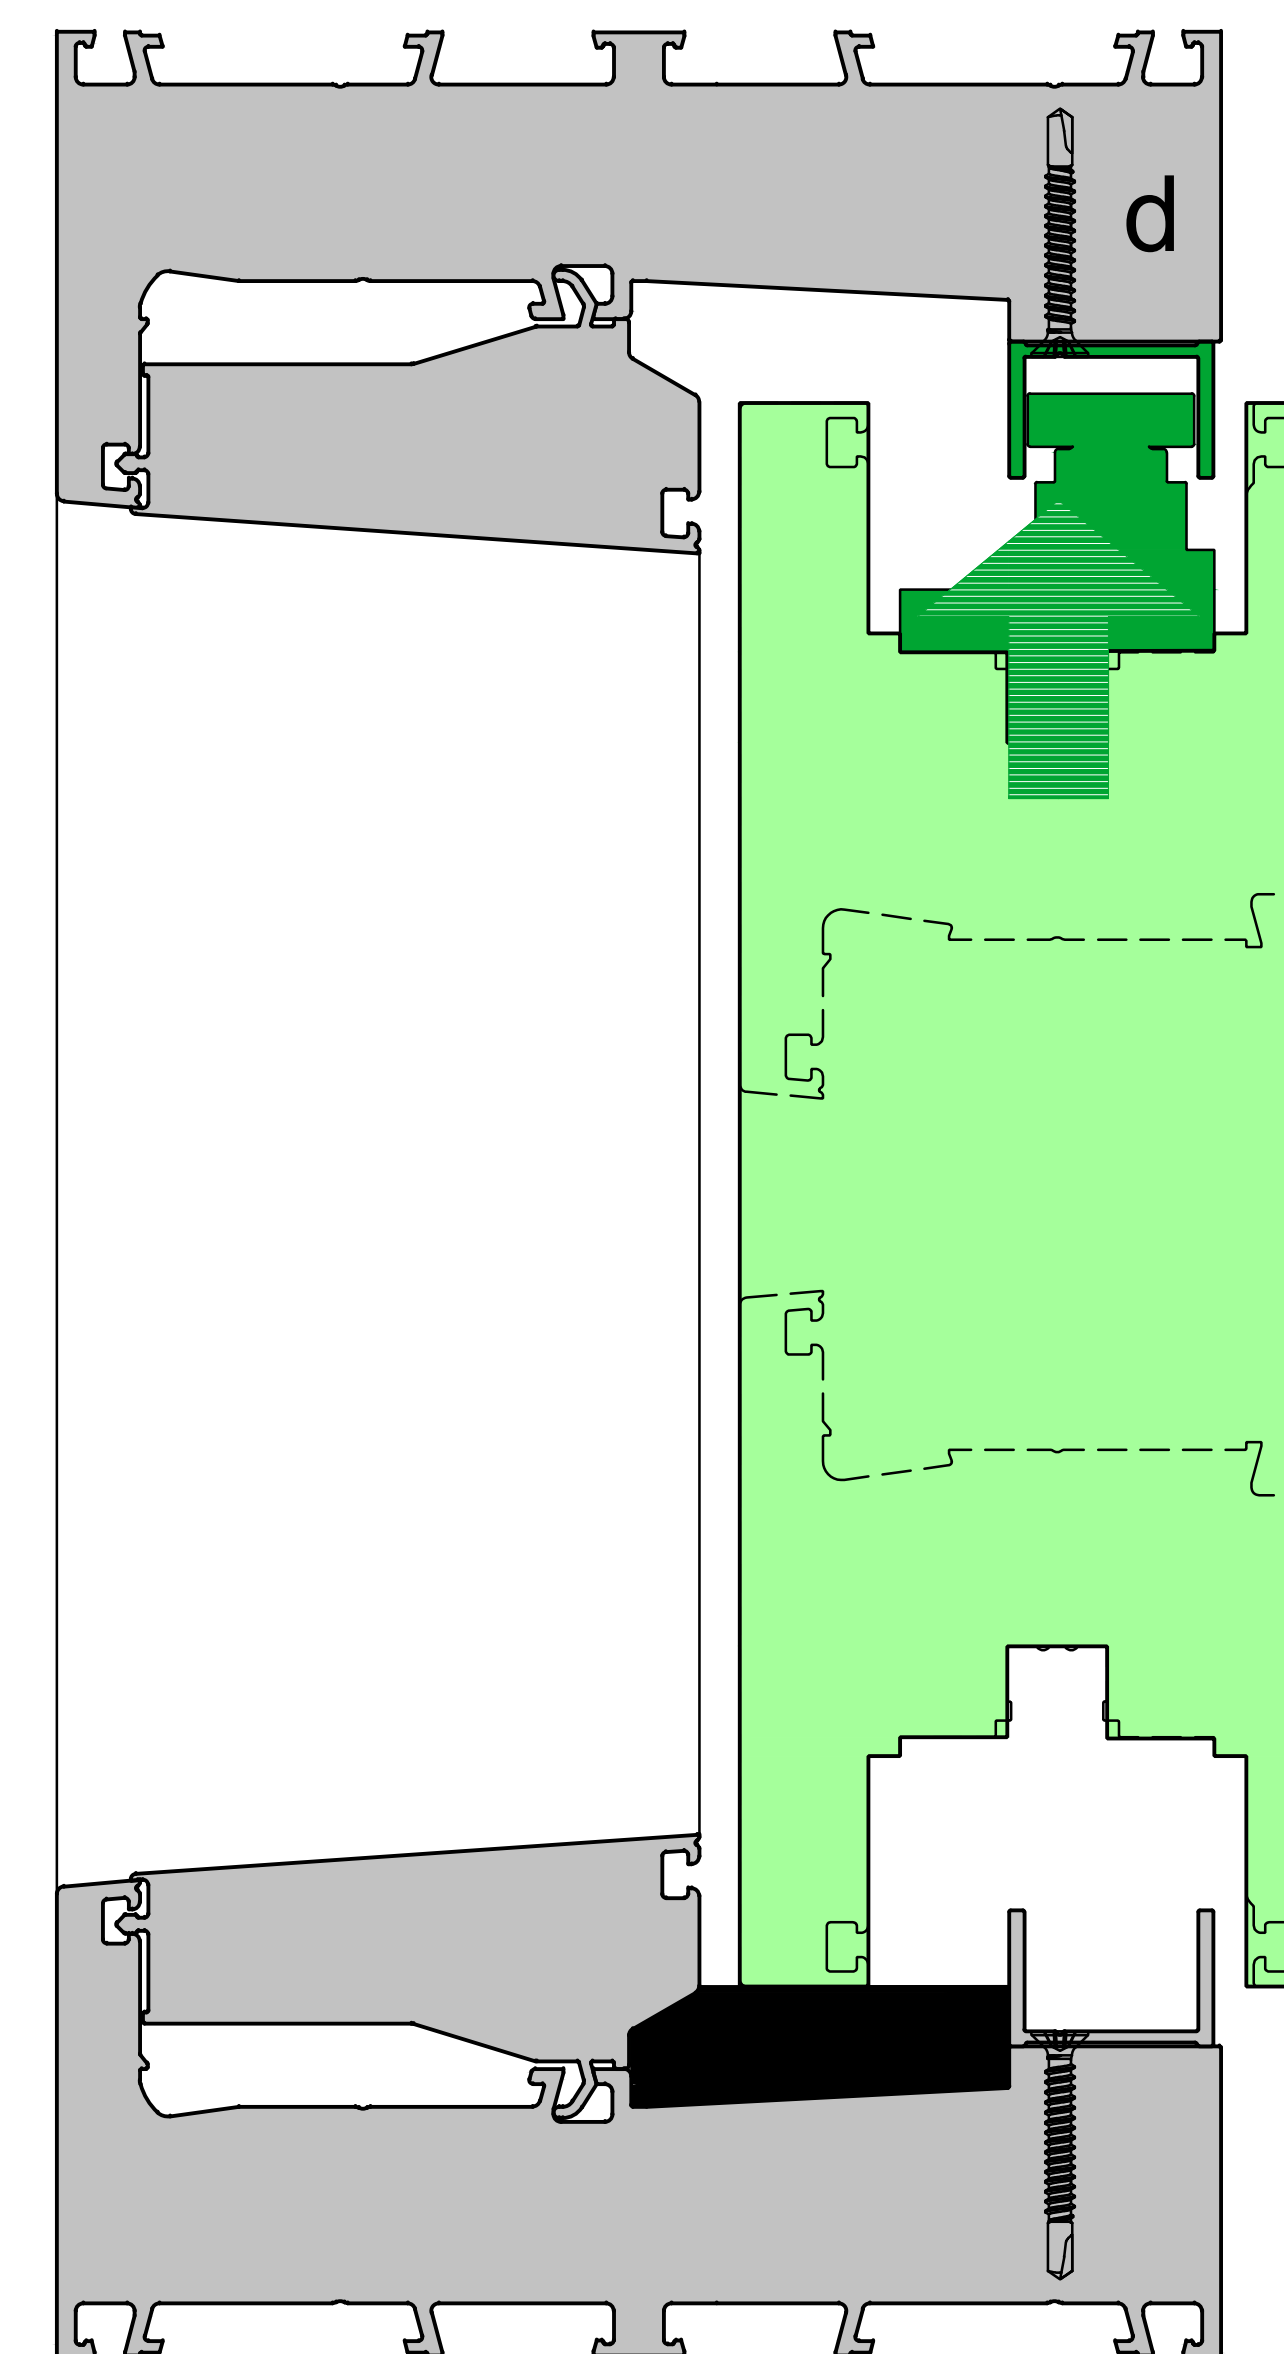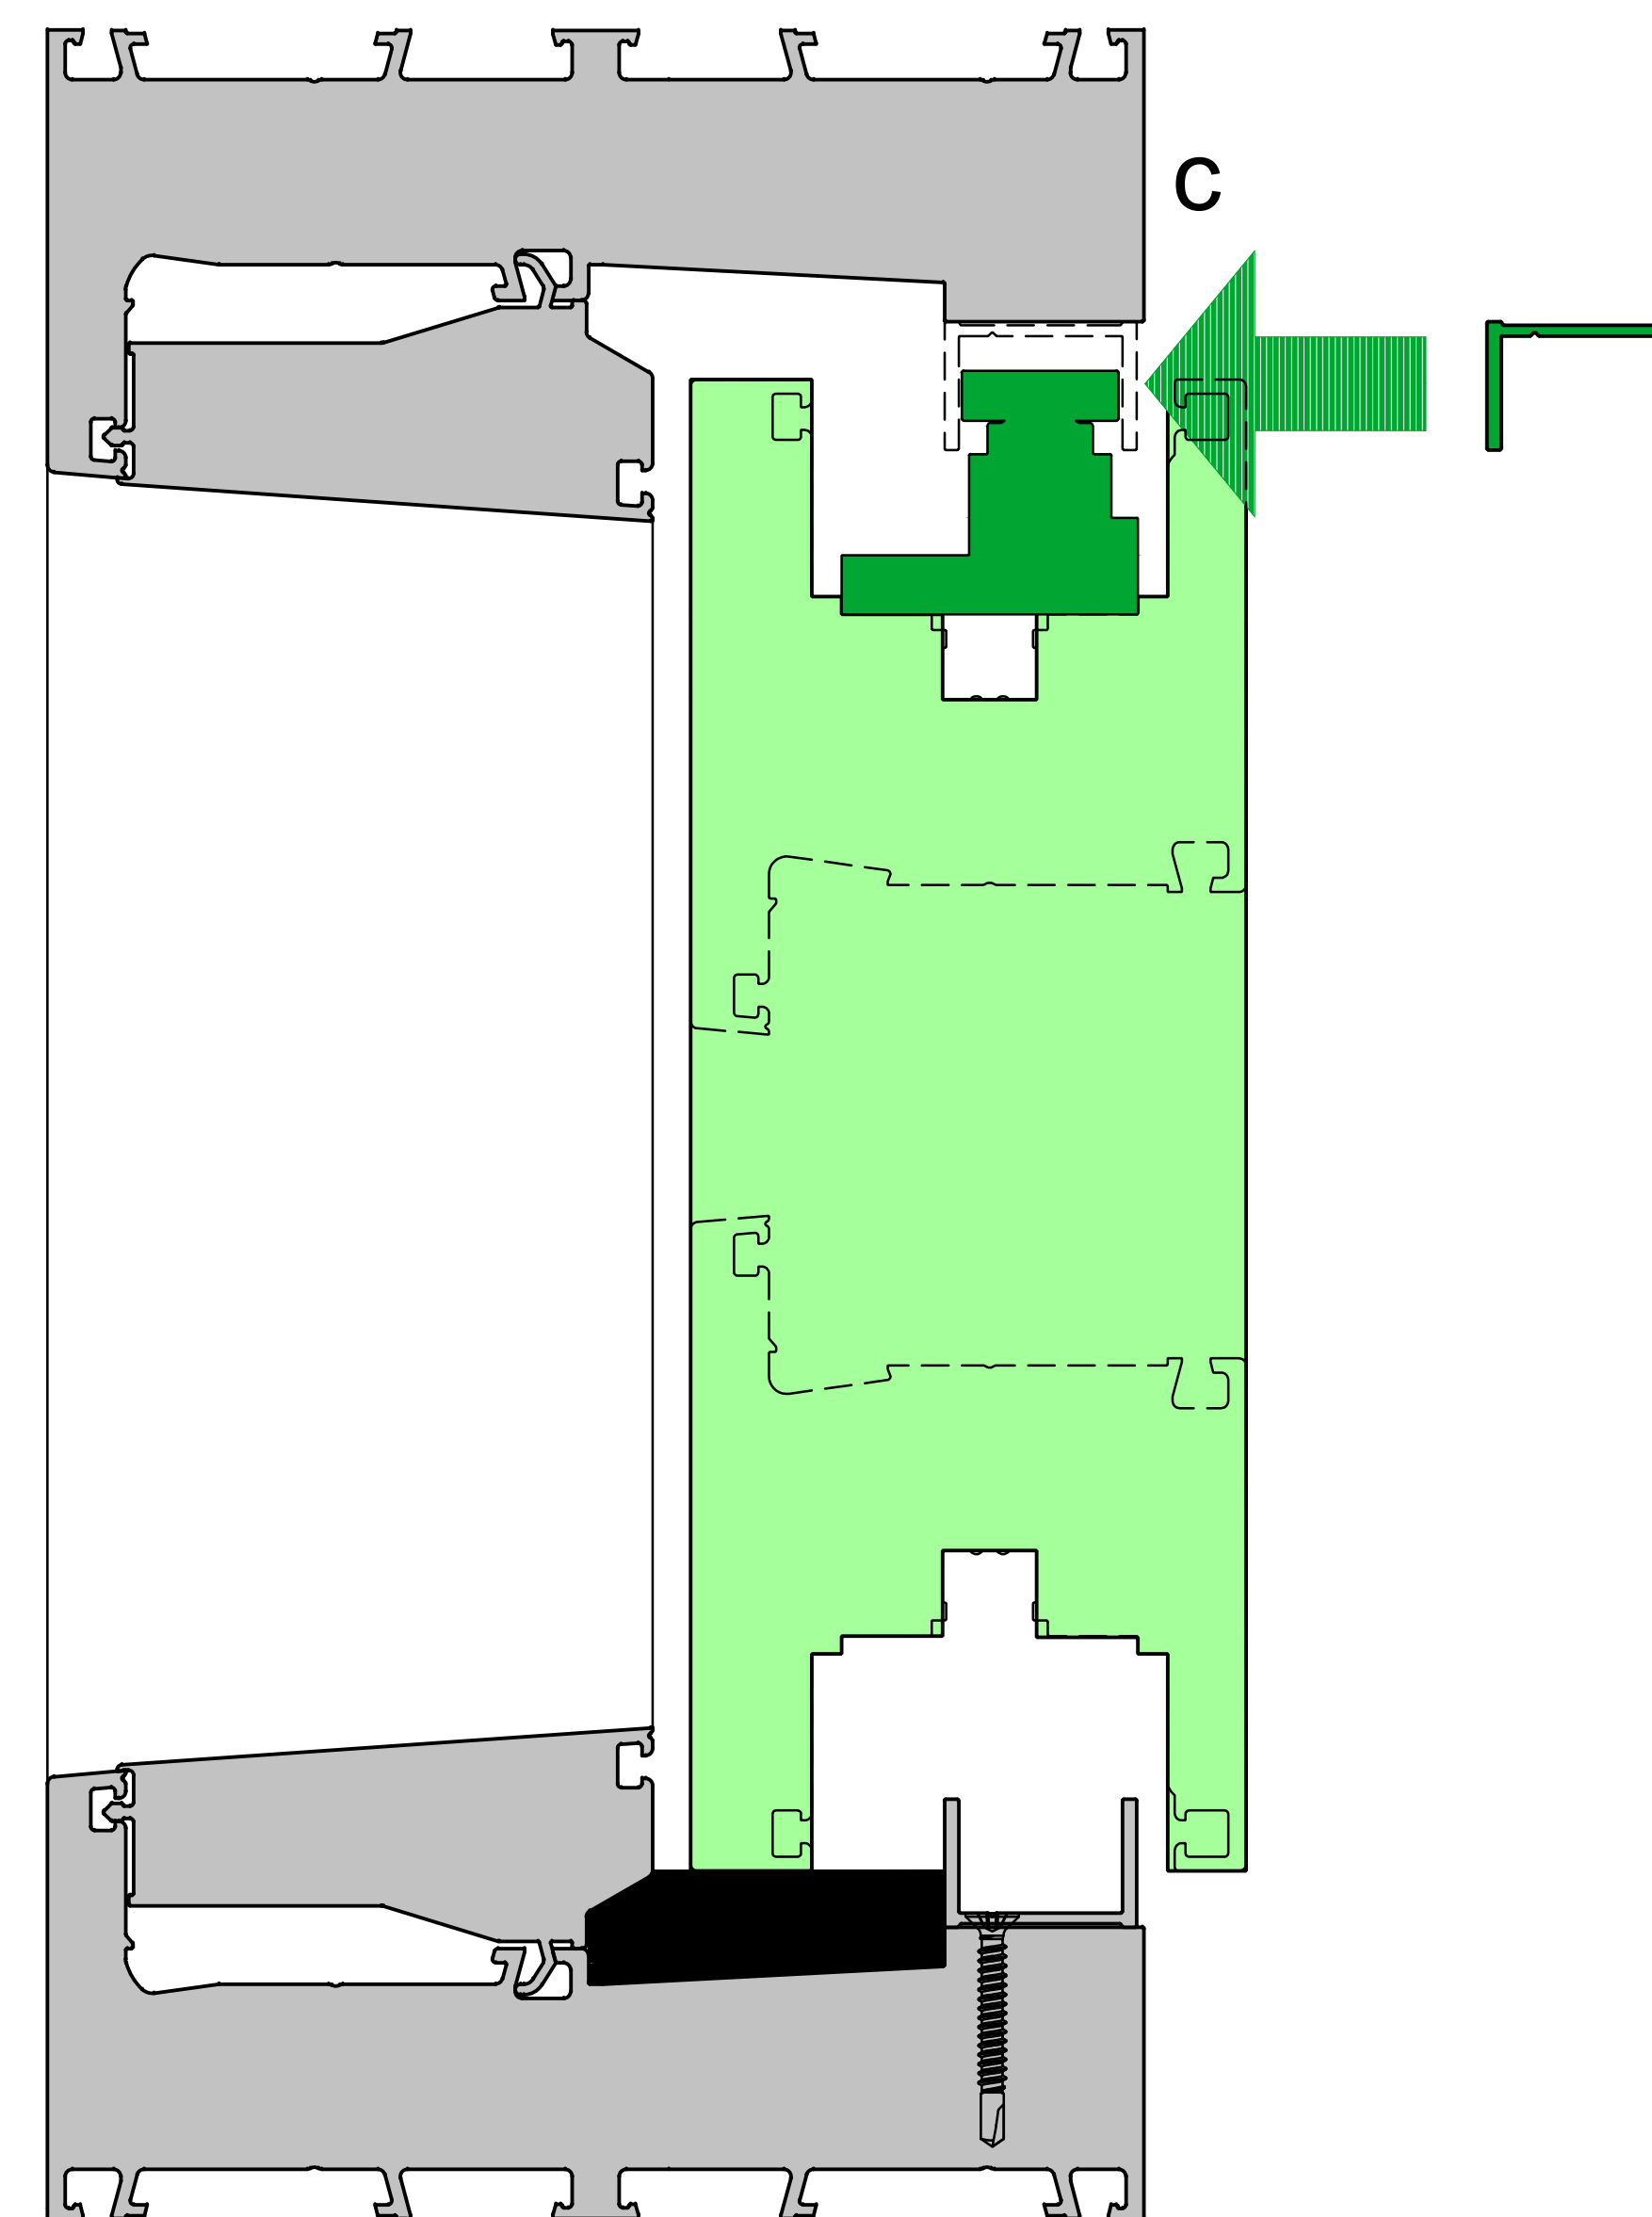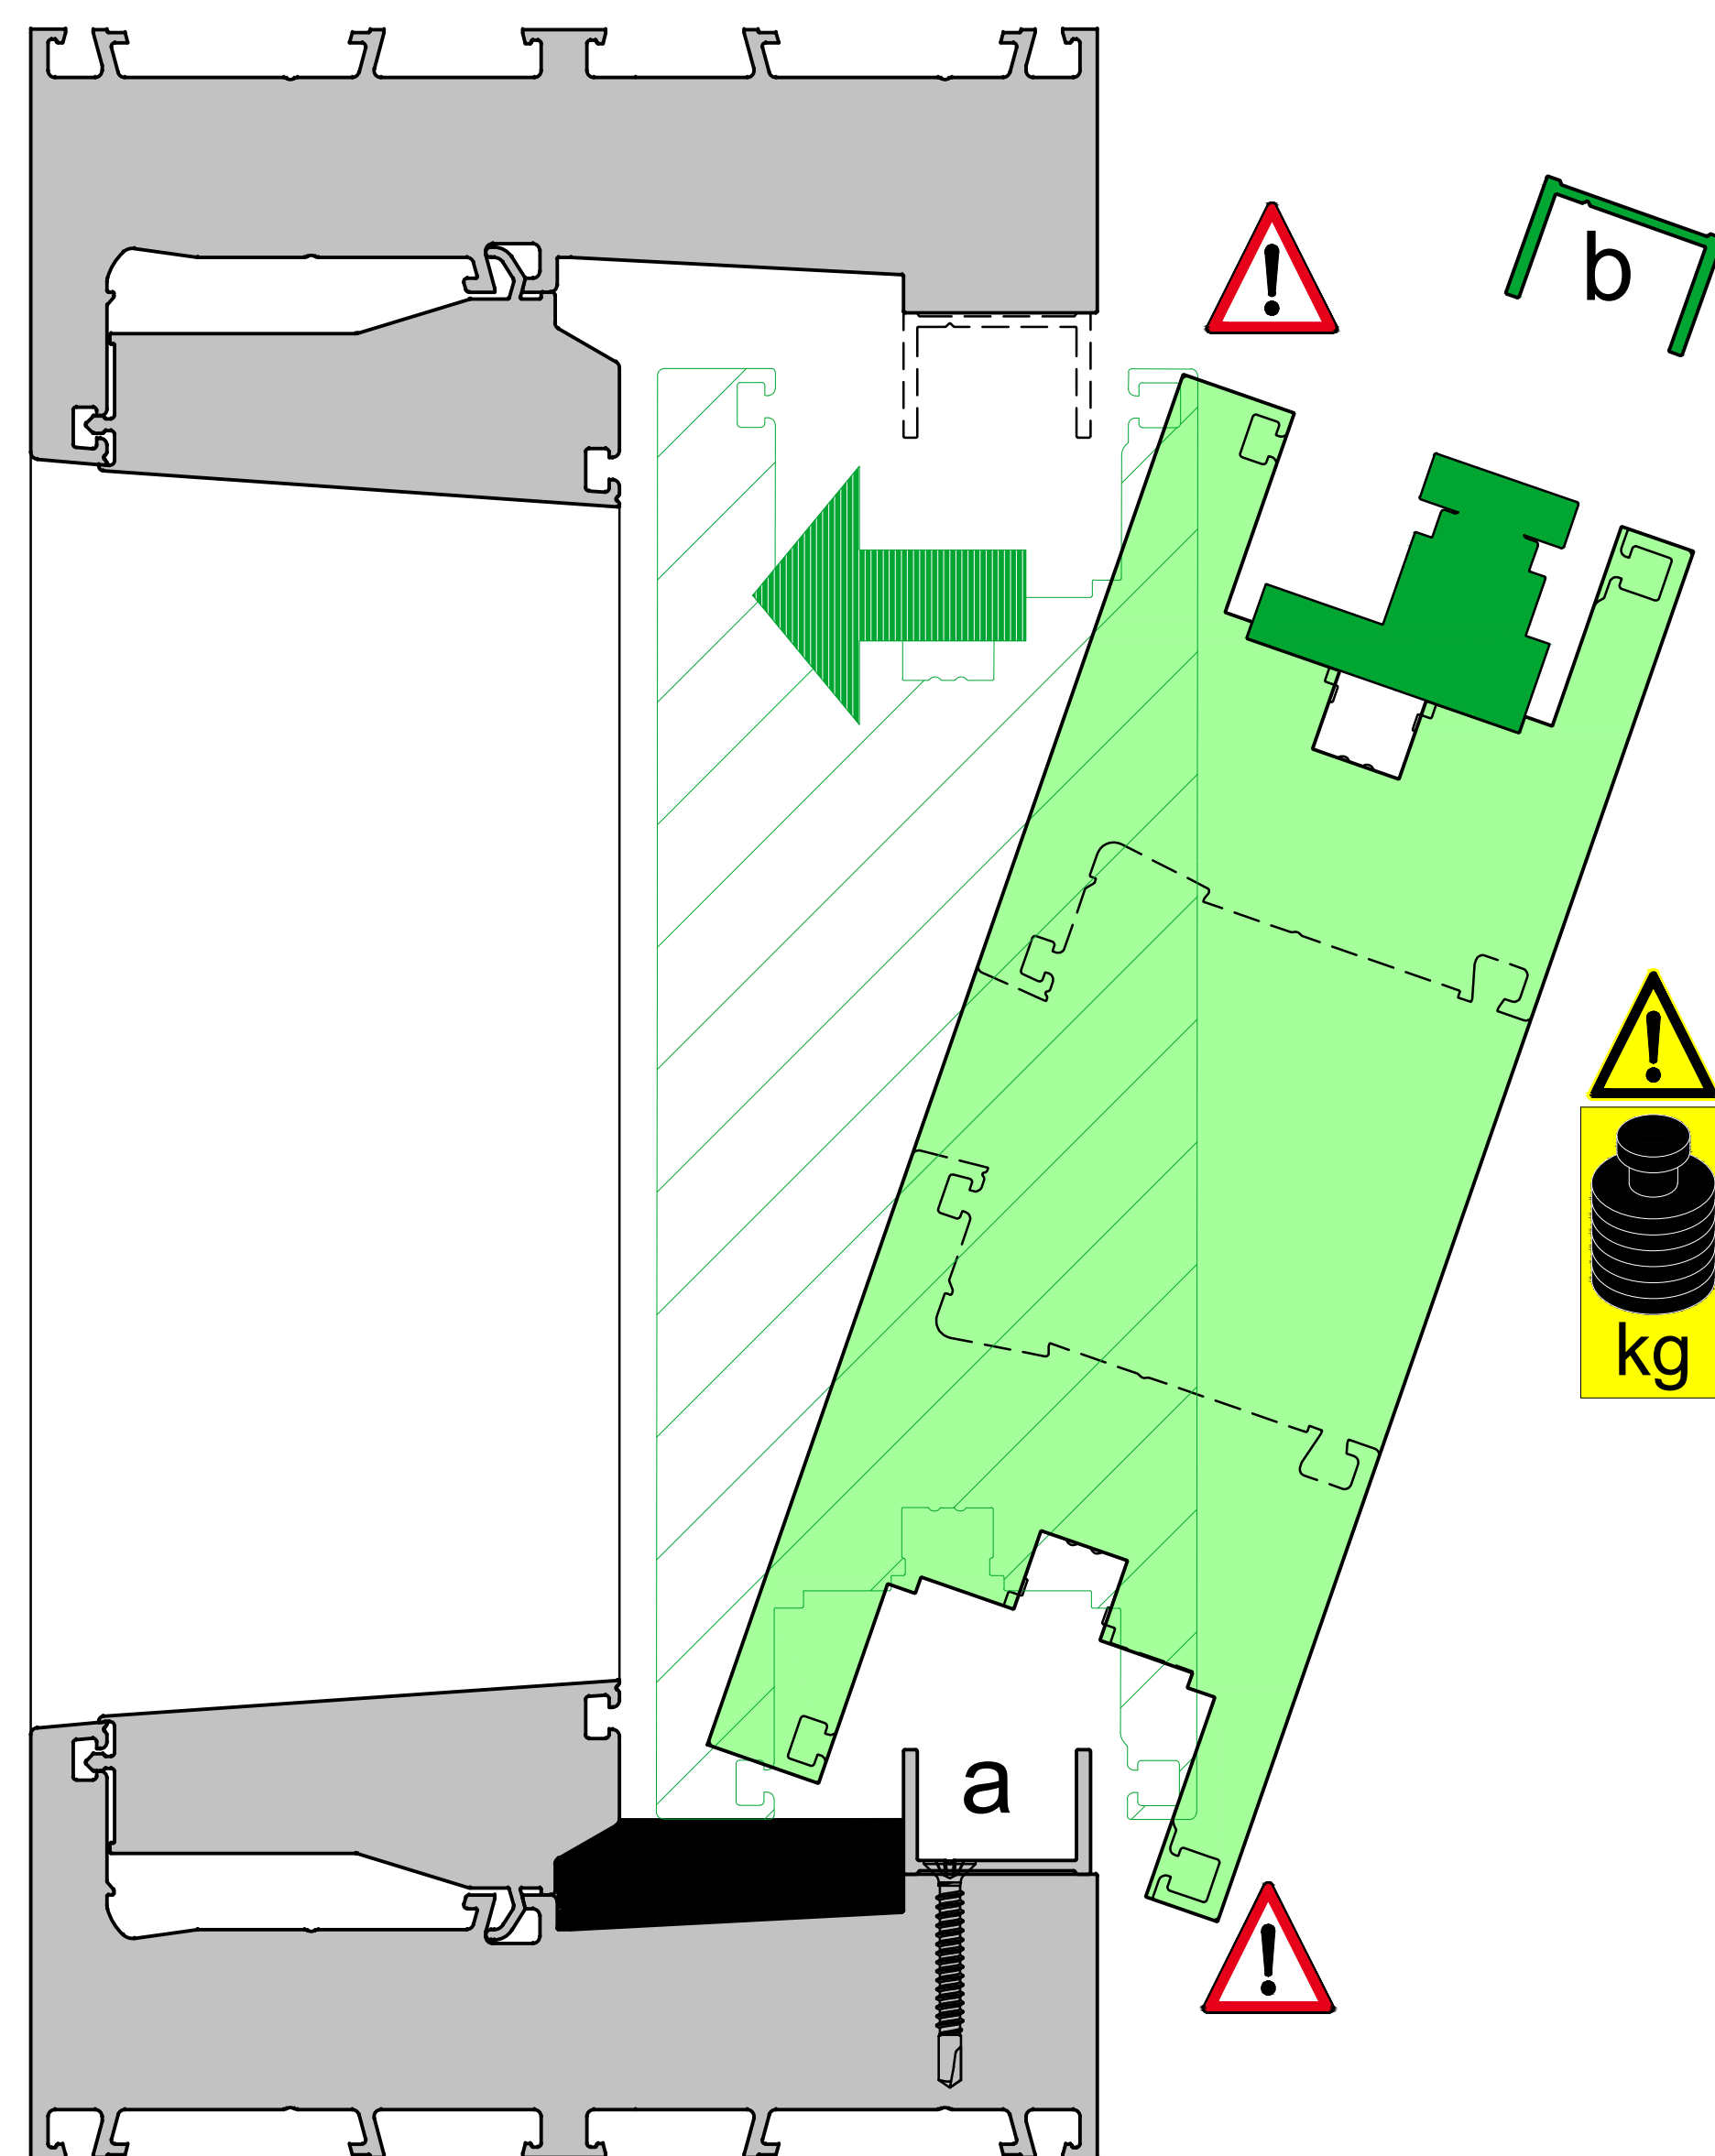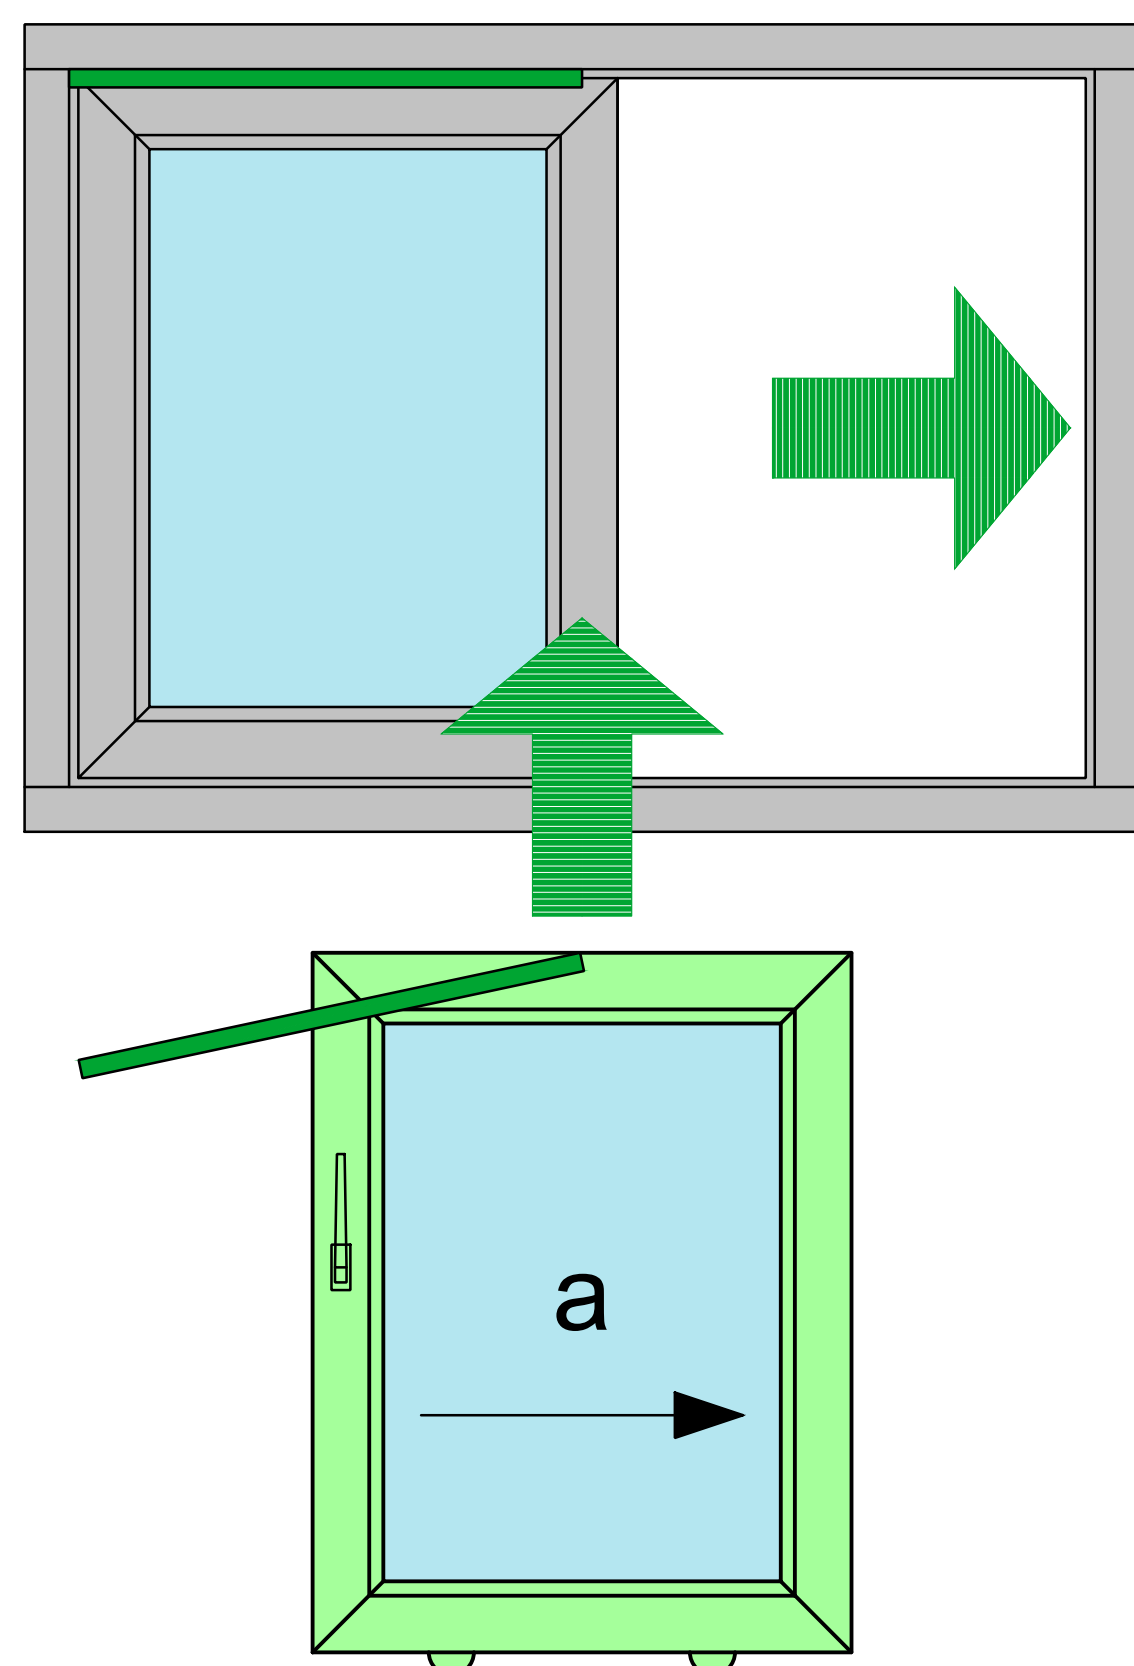






Dismounting

1. Remove the screws (a) carefully.

2. Move the sliding sash to the fixed side of product. Remove the one half of guide rail from frame (c).

3. Move the sliding sash (a) back in position and tilt it.

4.

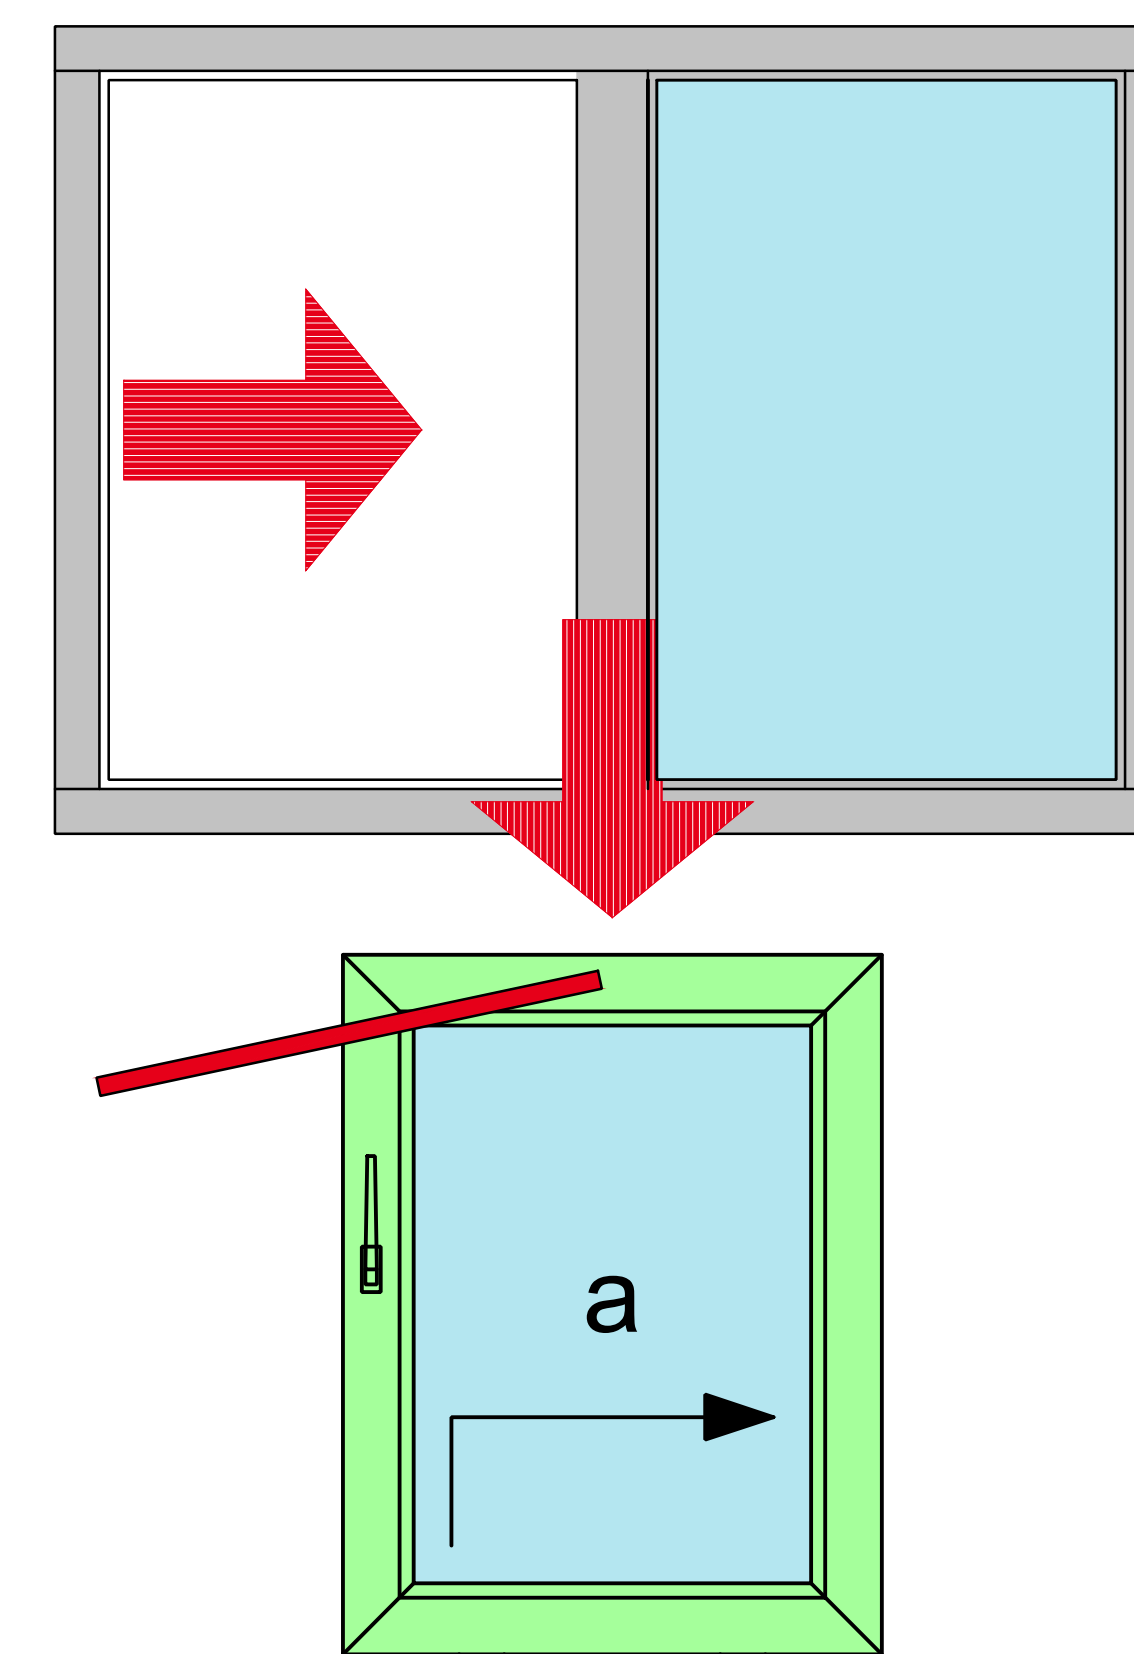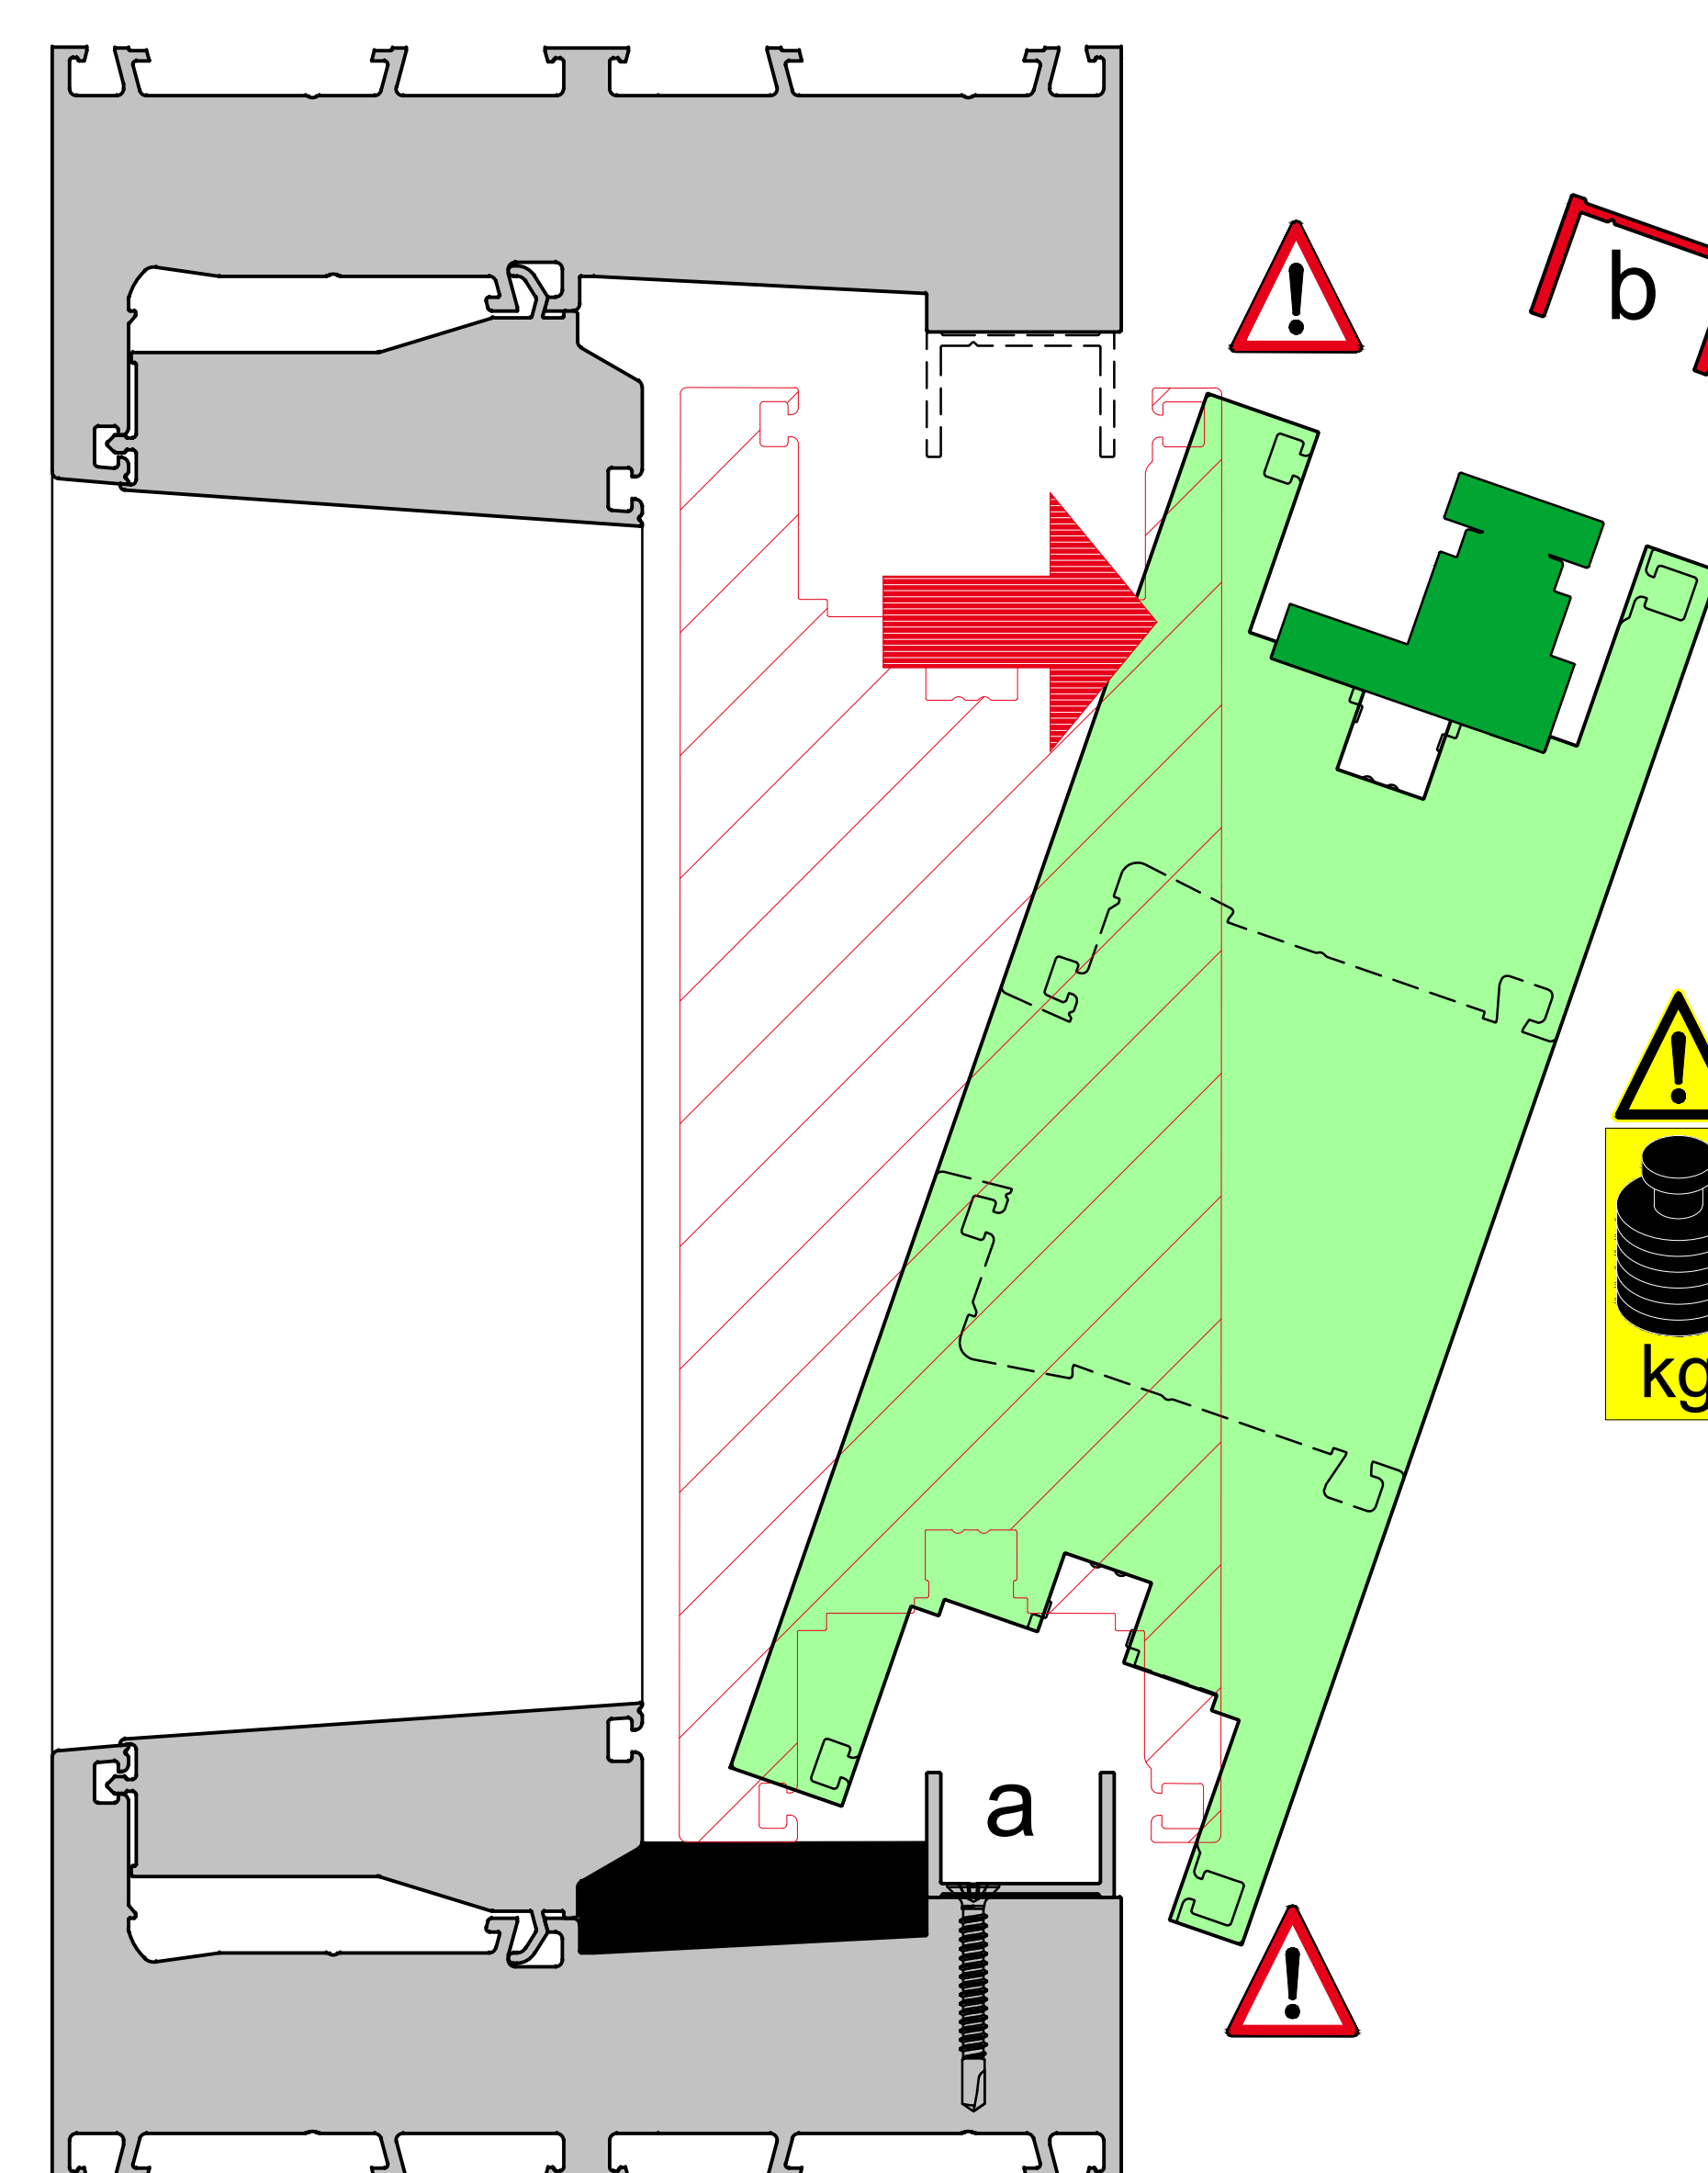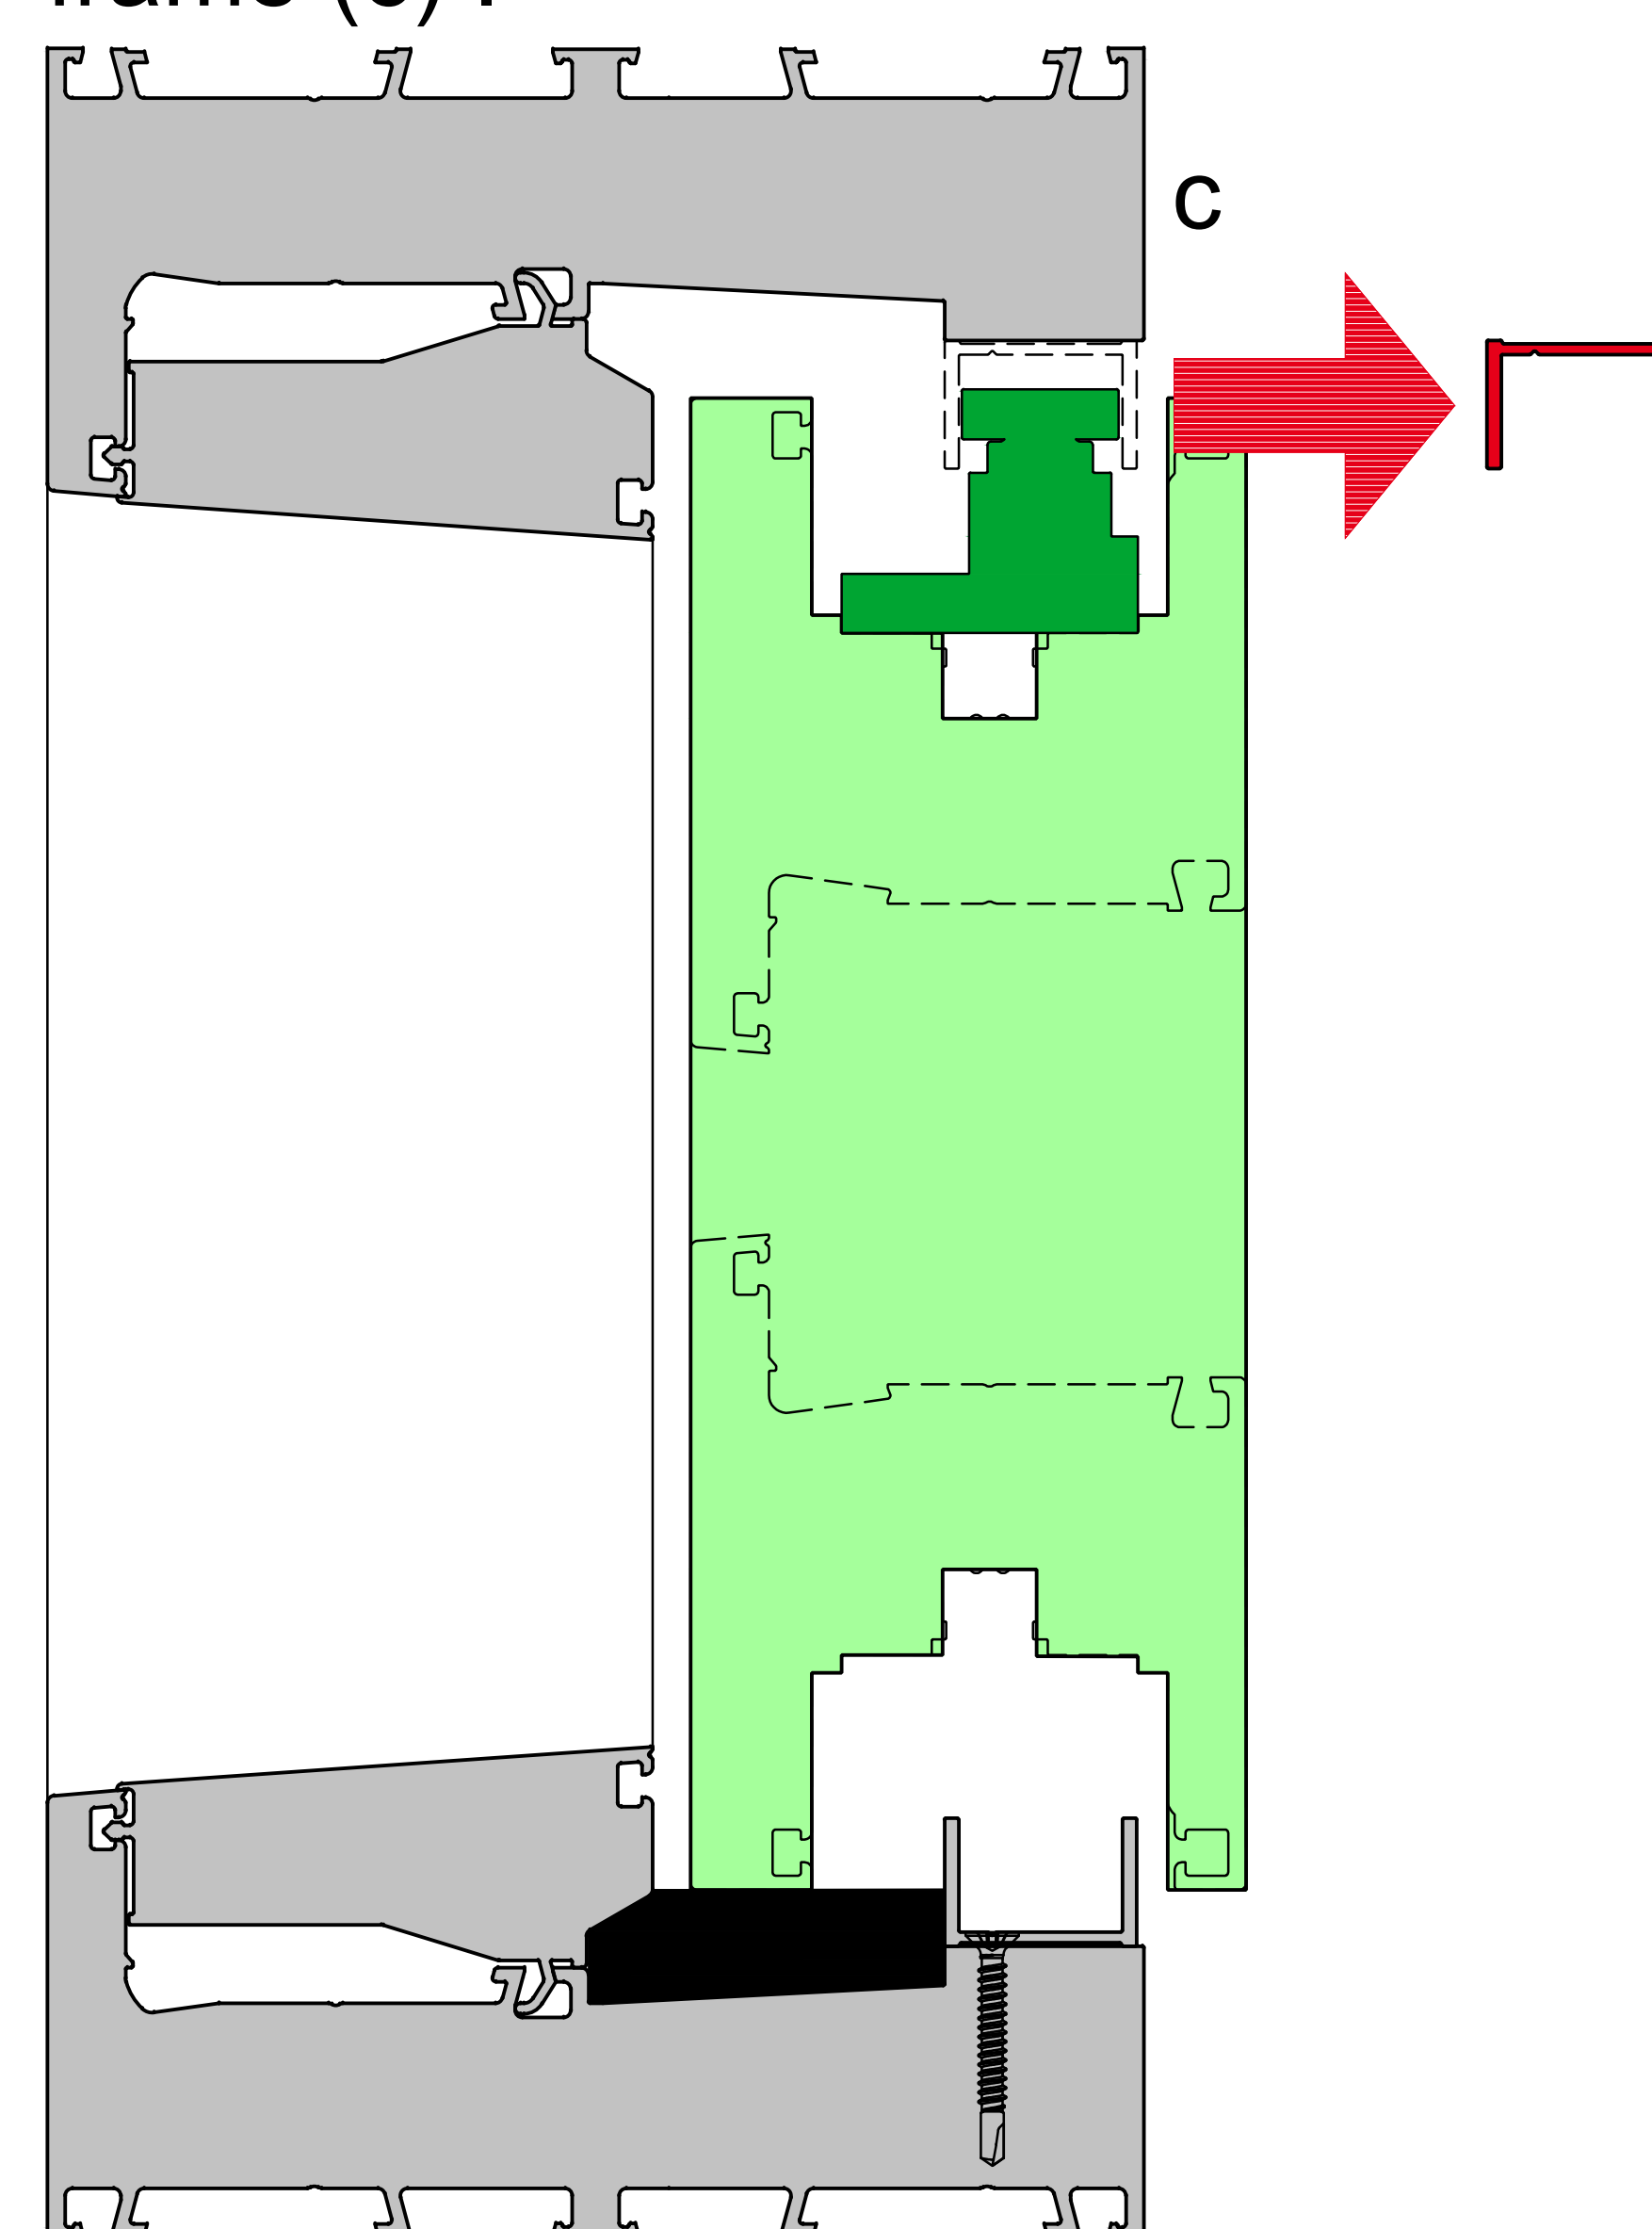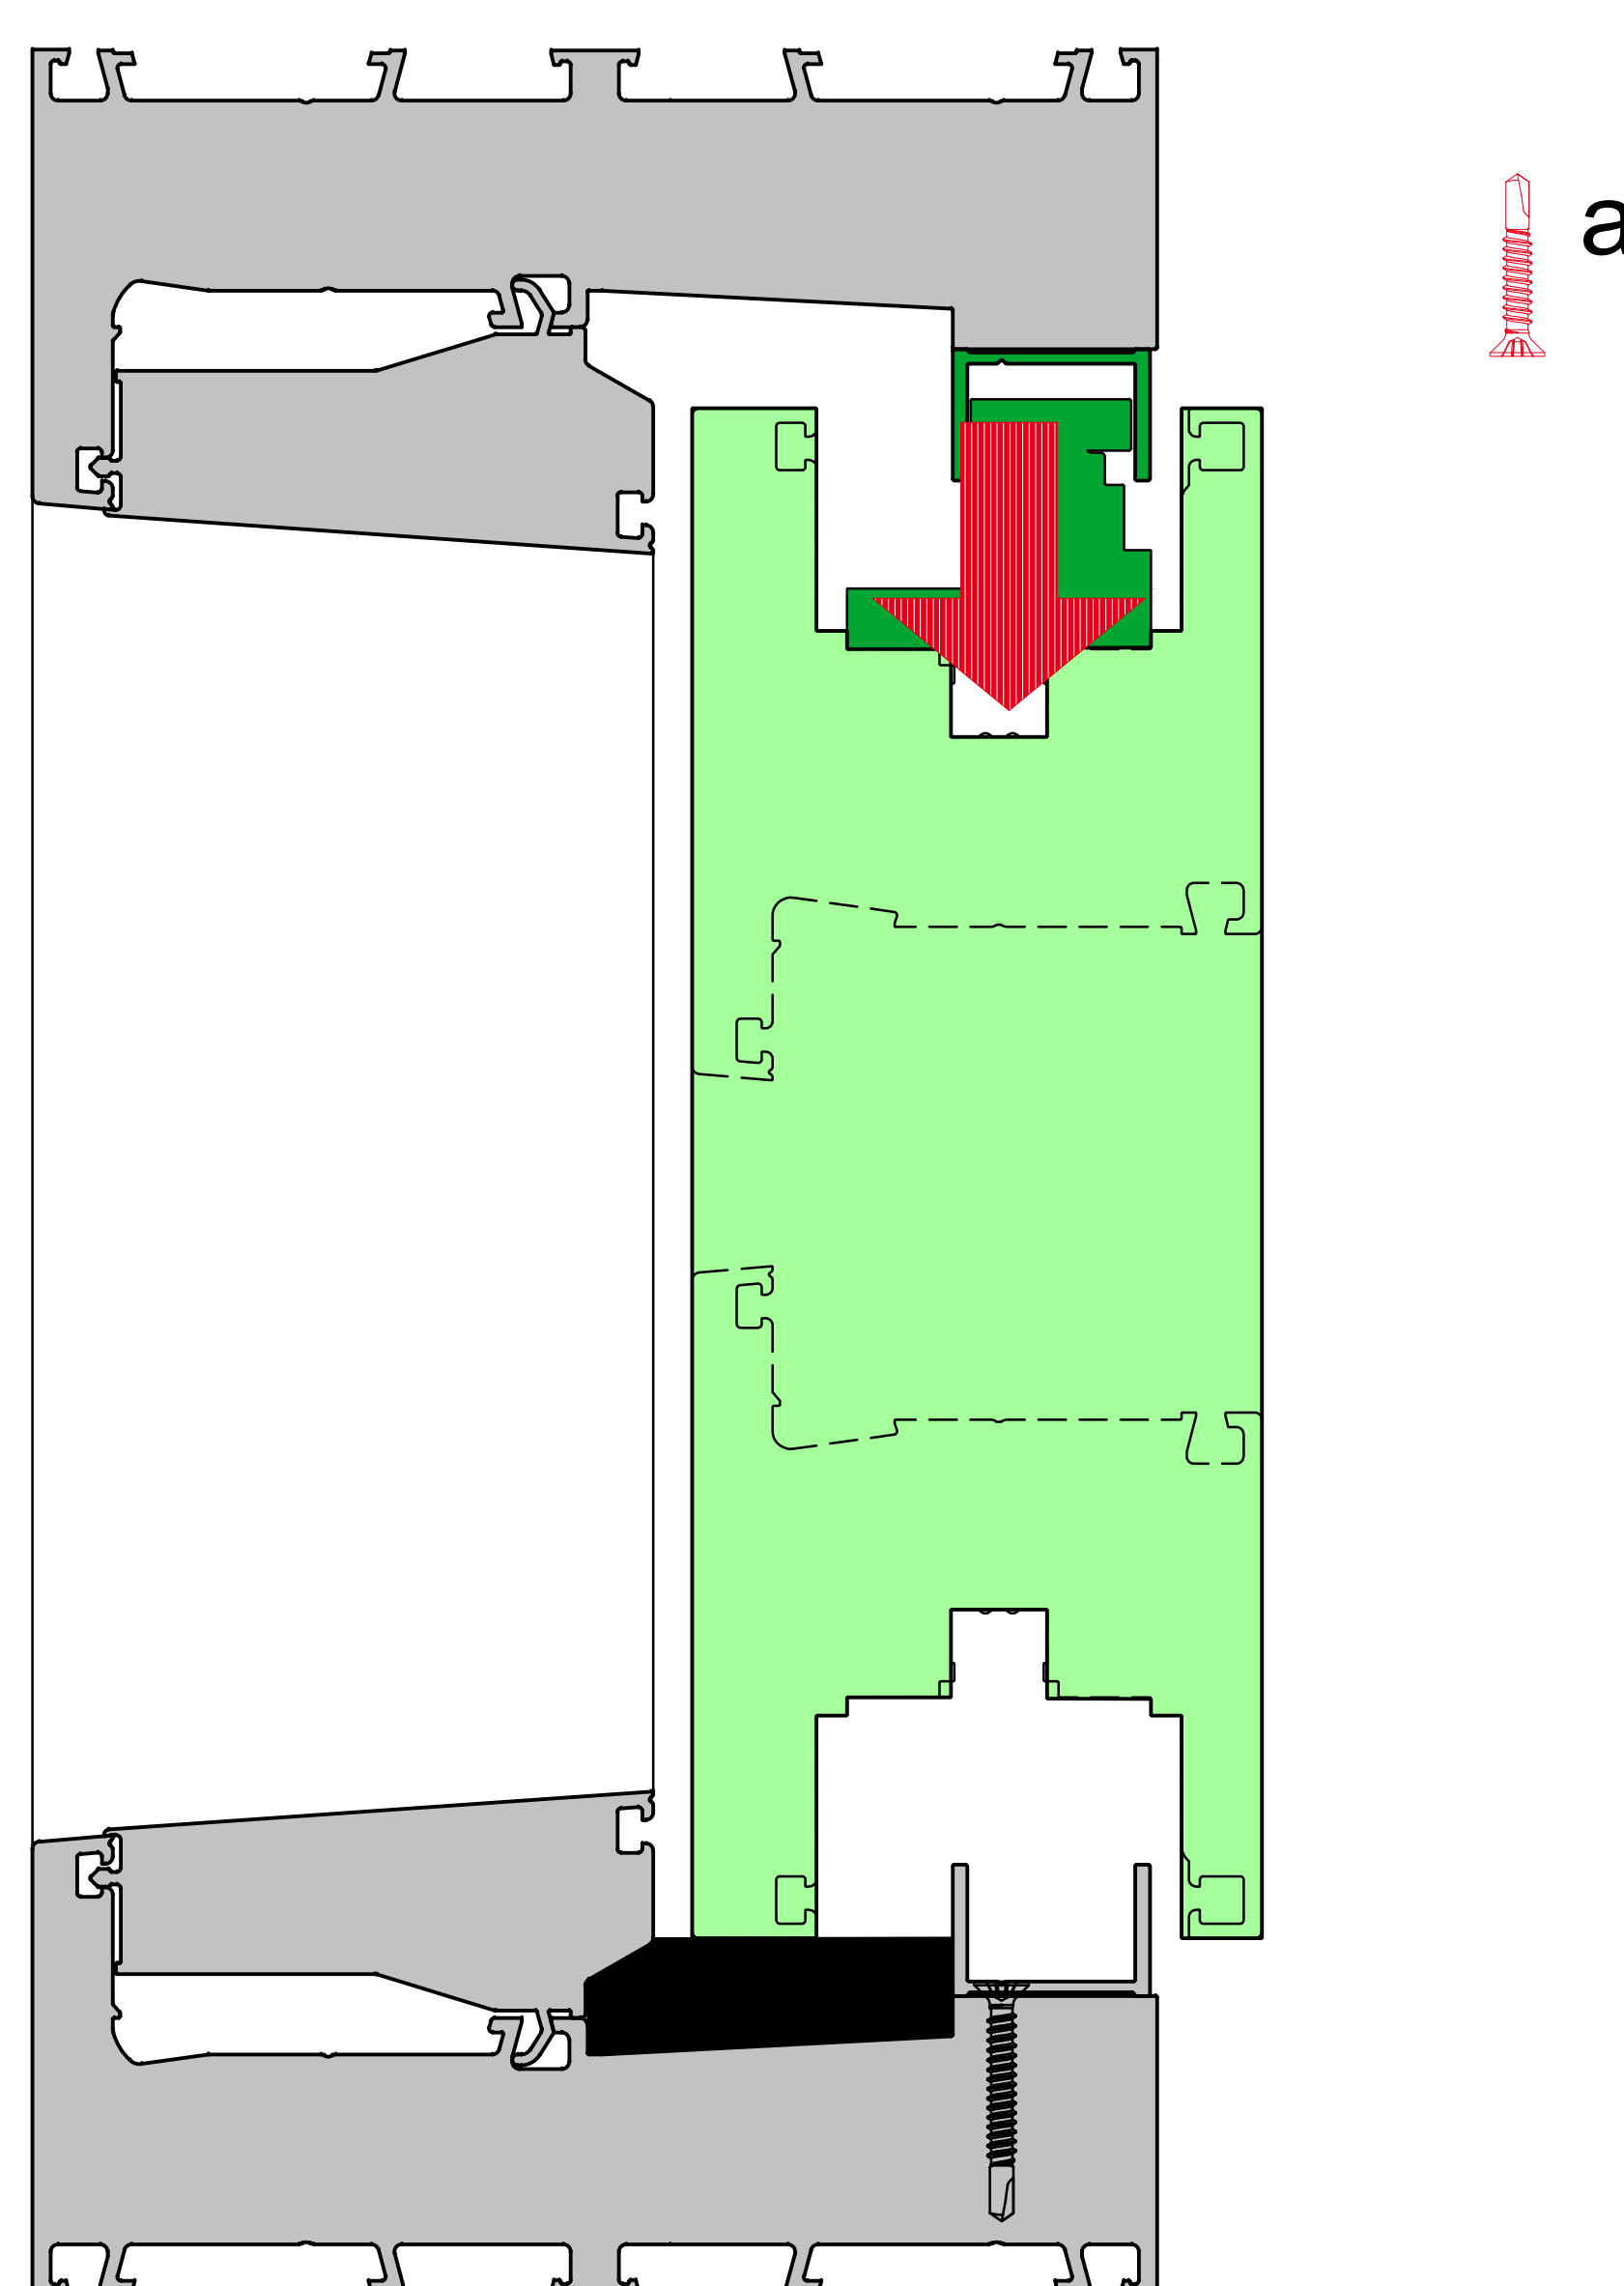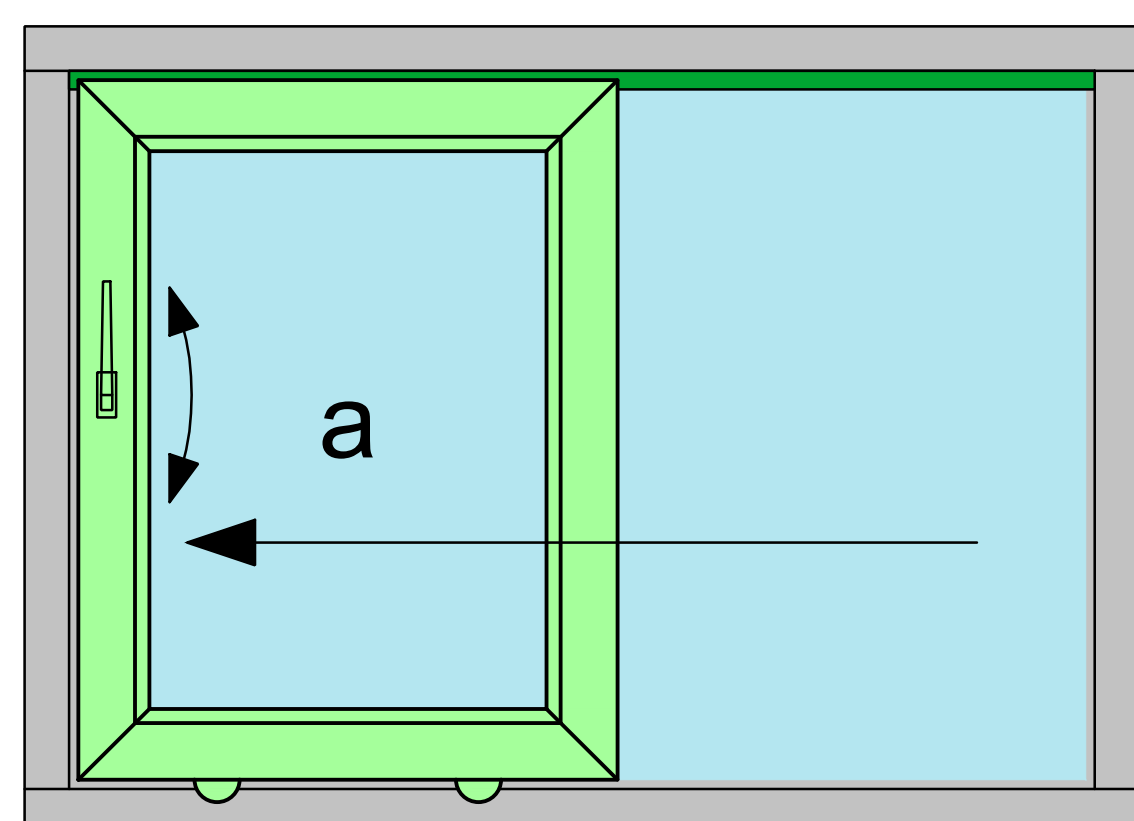

Dismounting of the Sliding Sash